


# 2005 ANNUAL REPORT

to the  
GOVERNMENTS OF CANADA, UNITED STATES,  
SASKATCHEWAN AND MONTANA

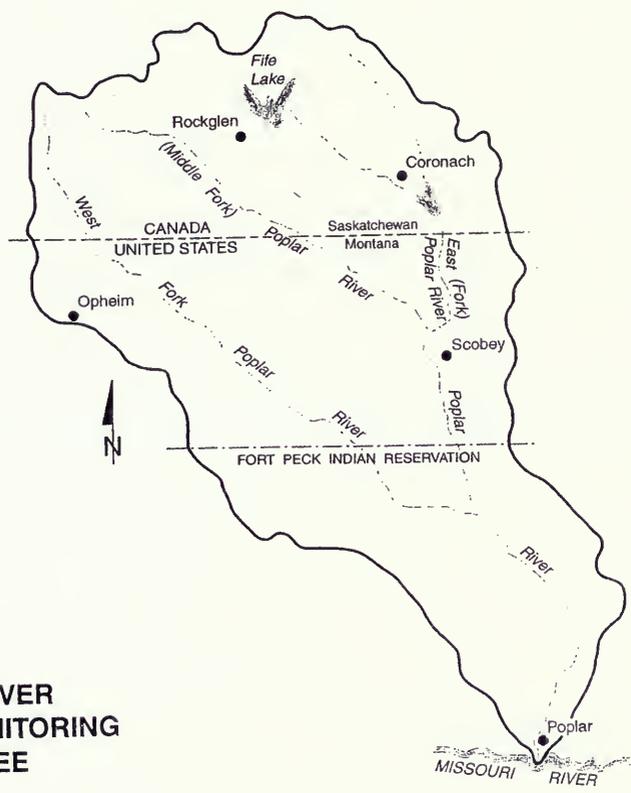

by the

**POPLAR RIVER  
BILATERAL MONITORING  
COMMITTEE**

**COVERING CALENDAR YEAR 2005**

**December 2006**

STATE DOCUMENTS COLLECTION

FEB 20 2007

MONTANA STATE LIBRARY  
1515 E. 6th AVE.  
HELENA, MONTANA 59620

Montana State Library



3 0864 1003 9002 3

2005 ANNUAL REPORT  
to the

GOVERNMENTS OF CANADA, UNITED STATES,  
SASKATCHEWAN, AND MONTANA

by the

POPLAR RIVER BILATERAL MONITORING COMMITTEE  
COVERING CALENDAR YEAR 2005

December 2006



## Poplar River Bilateral Monitoring Committee

Department of State  
Washington, D.C., United States

Department of Foreign Affairs  
and International Trade Canada  
Ottawa, Ontario, Canada

Governor's Office  
State of Montana  
Helena, Montana, United States

Saskatchewan Environment  
Regina, Saskatchewan, Canada

Ladies and Gentlemen:

Herein is the 25th Annual Report of the Poplar River Bilateral Monitoring Committee. This report discusses the Committee activities of 2005 and presents the Technical Monitoring Schedules for the year 2006.

During 2005, the Poplar River Bilateral Monitoring Committee continued to fulfill the responsibilities assigned by the governments under the Poplar River Cooperative Monitoring Agreement dated September 23, 1980. Through exchange of Diplomatic Notes in March 1987, July 1992, July 1997, and March 2002, the Arrangement was extended. The Monitoring Committee is currently extended to March 2007.

The enclosed report summarizes current water-quality conditions and compares them to guidelines for specific parameter values that were developed by the International Joint Commission under the 1977 Reference from Canada and the United States. After evaluation of the monitoring information for 2005, the Committee finds that the measured conditions meet the recommended objectives.


Based on IJC recommendations, the United States was entitled to an on-demand release of 617 dam<sup>3</sup> (500 acre-feet) from Cookson Reservoir in 2005. A volume of 678 dam<sup>3</sup> (550 acre-feet) was delivered to the United States between May 1 and May 31, 2005. In addition, daily flows in 2005 met or exceeded the minimum flow recommended by the IJC except for days (July 29; August 10, 23, 30, 31; September 4, 8, 13, 14) when daily flows fell below the recommended minimum due to temporary damming of the stream by upstream beaver activity.

During 2005, monitoring continued in accordance with Technical Monitoring Schedules outlined in the 2004 Annual Report of the Poplar River Bilateral Monitoring Committee.

Yours sincerely,




Robert E. Davis  
Chairman, United States Section



John E. Tubbs  
Member, United States Section



Wayne Dybvig  
Chairman, Canadian Section



Chuck Bosgoed  
Member, Canadian Section



## TABLE OF CONTENTS

Highlights for 2005 .....	iii
1.0 Introduction .....	1
2.0 Committee Activities.....	2
2.1 Membership.....	2
2.2 Meetings .....	2
2.3 Review of Water-Quality Objectives .....	3
2.4 Data Exchange.....	4
2.5 Water-Quality Monitoring Responsibilities .....	4
3.0 Water and Air: Monitoring and Interpretations.....	6
3.1 Poplar River Power Station Operation .....	6
3.2 Surface Water.....	6
3.2.1 Streamflow .....	6
3.2.2 Apportionment.....	7
3.2.3 Minimum Flows .....	7
3.2.4 On-Demand Release .....	8
3.2.5 Surface-Water Quality.....	9
3.2.5.1 Total Dissolved Solids.....	10
3.2.5.2 Boron .....	14
3.2.5.3 Other Water-Quality Objectives.....	17
3.3 Ground Water.....	19
3.3.1 Operations-Saskatchewan .....	19
3.3.2 Ground-Water Monitoring .....	21
3.3.2.1 Saskatchewan .....	22
3.3.2.2 Montana .....	24
3.3.3 Ground-Water Quality.....	26
3.3.3.1 Saskatchewan .....	26
3.3.3.2 Montana.....	30
3.4 Cookson Reservoir .....	31
3.4.1 Storage.....	31
3.4.2 Water Quality .....	32
3.5 Air Quality.....	33
3.6 Quality Control.....	33
3.6.1 Streamflow .....	33
3.6.2 Water Quality .....	33
ANNEXES	
1.0 Poplar River Cooperative Monitoring Arrangement, Canada-United States .....	A1
2.0 Poplar River Cooperative Monitoring Arrangement, Technical Monitoring Schedules, 2006, Canada-United States.....	A2
3.0 Recommended Flow Apportionment in the Poplar River Basin.....	A3
4.0 Conversion Factors.....	A4

## TABLES

Table 2.1	Water-Quality Objectives.....	5
Table 3.1	Recommended Water-Quality Objectives and Excursions, 2005 Sampling Program, East Poplar River at International Boundary.....	18
Table 3.2	Geologic Formation Name Equivalence between Saskatchewan and Montana ....	21
Table 3.3	Water-Quality Statistics for Water Pumped from Supplementary Water Supply Project Wells .....	26
Table 3.4	Water-Quality Statistics for Water Pumped from Salinity Control Project Wells Sampled at the Discharge Pipe.....	27
Table 3.5	Cookson Reservoir Storage Statistics for 2005.....	31
Table 3.6	Streamflow Measurement Results for September 2005.....	33

## FIGURES

Figure 3.1	Discharge during 2005 as Compared with the Median Discharge from 1931-2000 for the Poplar River at International Boundary.....	6
Figure 3.2	Flow Hydrograph of the East Poplar River at International Boundary .....	8
Figure 3.3	Cumulative Volume Hydrograph of On-Demand Release.....	9
Figure 3.4	Monthly Mean TDS Concentration for 2005 Derived from Water-Quality Samples or Average Mid-month Monthly Conductance Data Collected by Specific-Conductance Monitor at East Poplar River at International Boundary ...	12
Figure 3.5	Three-Month Moving Flow-Weighted Average TDS Concentration for East Poplar River at International Boundary.....	12
Figure 3.6	Five-Year Moving Flow-Weighted Average TDS Concentration for East Poplar River at International Boundary.....	13
Figure 3.7	Daily TDS Concentration, 1990 to 2005, East Poplar River at International Boundary .....	13
Figure 3.8	Monthly Mean Boron Concentration for 2005 Derived from Water-Quality Samples or Average Mid-Month Monthly Conductance Data Collected by Specific-Conductance Monitor at East Poplar River at International Boundary .....	15
Figure 3.9	Three-Month Moving Flow-Weighted Average Boron Concentration for East Poplar River at International Boundary.....	15
Figure 3.10	Five-Year Moving Flow-Weighted Average Boron Concentration for East Poplar River at International Boundary.....	16
Figure 3.11	Daily Boron Concentration, 1990 to 2005, East Poplar River at International Boundary .....	16
Figure 3.12	Supplementary Water Supply.....	19
Figure 3.13	Pumpage from Salinity Control Project .....	21
Figure 3.14	Hydrograph of Selected Wells – Cookson Reservoir Supplementary Supply Ground Water Monitoring Network.....	23
Figure 3.15	Hydrograph of Selected Wells – Cookson Reservoir Supplementary Supply Ground Water Monitoring Network .....	23
Figure 3.16	Hydrograph of Selected Wells - Fort Union and Hart Coal Aquifers .....	24
Figure 3.17	Hydrograph of Selected Wells - Alluvium and Fox Hills/Hell Creek Aquifers.....	25
Figure 3.18	Total Dissolved Solids in Samples from Montana Wells .....	30
Figure 3.19	Cookson Reservoir Daily Mean Water Levels for 2005 and Median Daily Water Levels, 1994-2004 .....	32

## HIGHLIGHTS FOR 2005

The Poplar River Power Station completed its twenty-second full year of operation in 2005. The two 300-megawatt coal-fired units generated 4,345,960 gross megawatts (MW) of electricity. The average capacity factors for Units No. 1 and 2 were 81.5 percent and 80.7 percent, respectively. The capacity factors are based on the maximum generating rating of 305 MW/h for both Unit No.1 and Unit No. 2. Similar to other years, scheduled maintenance was completed in the spring and fall of 2005.

Monitoring information collected in both Canada and the United States during 2005 was exchanged in the spring of 2006.

The recorded volume of the Poplar River at International Boundary from March 1 to May 31, 2005 was 3,010 dam<sup>3</sup> (2,440 acre-feet). Based on International Joint Commission (IJC) recommendations and the assumption that the recorded flow is the natural flow, the United States was entitled to a minimum discharge on the East Poplar River of 0.028 cubic metres per second (m<sup>3</sup>/s) (1.0 cubic feet per second (ft<sup>3</sup>/s)) for the period June 1, 2005 to May 31, 2006. The minimum flow for the period January 1 to May 31, 2005 was 0.028 m<sup>3</sup>/s (1.0 ft<sup>3</sup>/s), which was determined on the basis of the Poplar River flow volume for March 1 to May 31, 2004. Daily flows in 2005 met or exceeded the minimum flow recommended by the IJC except for several days (July 29; August 10, 23, 30, 31; September 4, 8, 13, 14), when daily flows fell below the recommended minimum due to temporary damming of the stream by upstream beaver activity.

In addition to the minimum flow, the IJC apportionment recommendation entitles the United States to an on-demand release to be delivered on the East Poplar River during the twelve-month period commencing June 1. Based on the runoff volume of 8,410 dam<sup>3</sup> (6,820 acre-feet) recorded at the Poplar River at International Boundary gauging station for March 1 through May 31, 2004, the United States was entitled to an additional release of 617 dam<sup>3</sup> (500 acre-feet) from Cookson Reservoir during the succeeding twelve-month period commencing June 1, 2004. Montana requested this release to be made between May 1 and May 31, 2005. A volume of 678 dam<sup>3</sup> (550 acre-feet), in addition to the minimum flow, was delivered during this period.

The 2005 five-year TDS flow-weighted concentrations were below the long-term objective of 1,000 milligrams per litre (mg/L). The maximum monthly value calculated in 2005 was about 954 mg/L, which was slightly higher than the 2004 maximum monthly value of 935 mg/L. Boron concentrations for 2005, though based upon a limited number of water-quality samples, continued to remain well below the long-term objective of 2.5 mg/L.



## 1.0 INTRODUCTION

The Poplar River Bilateral Monitoring Committee was authorized for an initial period of five years by the Governments of Canada and the United States under the Poplar River Cooperative Monitoring Arrangement dated September 23, 1980. A copy of the Arrangement is attached to this report as Annex 1. Through exchange of Diplomatic Notes, the Arrangement was extended in March 1987, July 1992, July 1997, and March 2002. The current extension expires in March 2007. A more detailed account of the historical background of the Monitoring Arrangement is contained in the 1990 Annual Report of the Poplar River Bilateral Monitoring Committee.

The Committee oversees monitoring programs designed to evaluate the potential for transboundary impacts from SaskPower's (formerly Saskatchewan Power Corporation) coal-fired thermal generating station and ancillary operations near Coronach, Saskatchewan. Monitoring is conducted in Canada and the United States at or near the International Boundary for quantity and quality of surface and ground water and for air quality. Participants from both countries, including Federal, State and Provincial agencies, are involved in monitoring.

The Committee submits an annual report to Governments which summarizes the monitoring results, evaluates apparent trends, and compares the data to objectives or standards recommended by the International Joint Commission (IJC) to Governments, or relevant State, Provincial, or Federal standards. The Committee reports to Governments on a calendar year basis. The Committee is also responsible for drawing to the attention of Governments definitive changes in monitored parameters which may require immediate attention.

A responsibility of the Committee is to review the adequacy of the monitoring programs in both countries and make recommendations to Governments on the Technical Monitoring Schedules. The Schedules are updated annually for new and discontinued programs and for modifications in sampling frequencies, parameter lists, and analytical techniques of ongoing programs. The Technical Monitoring Schedules listed in the annual report (Annex 2) are given for the year 2006. The Committee will continue to review and propose changes to the Technical Monitoring Schedules as information requirements change.

## **2.0 COMMITTEE ACTIVITIES**

### **2.1 Membership**

The Committee is composed of representatives of the Governments of the United States of America and Canada, the State Government of Montana, and the Provincial Government of Saskatchewan. In addition to the representatives of Governments, two ex-officio members serve as local representatives for the State of Montana and Province of Saskatchewan.

During 2005, the members of the Committee included: Mr. R. Davis, U.S. Geological Survey, United States representative and Cochair; Mr. R. Kellow (succeeded by Mr. W. Dybvig), Environment Canada, Canadian representative and Co-chair, Mr. J. Stults, Montana Department of Natural Resources and Conservation, Montana representative; Mr. C. Bosgoed, Saskatchewan Environment, Saskatchewan representative; Mr. C.W. Tande, Daniels County Commissioner, Montana local ex-officio representative; and Mr. D. Kirby, Reeve, R.M. of Hart Butte, Saskatchewan local ex-officio representative.

### **2.2 Meetings**

The Committee met on June 16, 2005 by a teleconference call. Delegated representatives of Governments, with the exception of the ex-officio members from Montana and Saskatchewan, attended the meeting. In addition to Committee members, several technical advisors representing Federal, State, and Provincial agencies participated in the meeting. During the meeting, the Committee reviewed the operational status of the Poplar River Power Station and associated coal-mining activities; examined data collected in 2004 including surface-water quality and quantity, ground-water quality and quantity, and air quality; discussed proposed changes in the water-quality sampling program; and established the Technical Monitoring Schedules for the year 2006.

### **2.3 Review of Water-Quality Objectives**

The International Joint Commission in its Report to Governments, titled “Water Quality in the Poplar River Basin,” recommended that the Committee periodically review the water-quality objectives within the overall Basin context and recommend new and revised objectives as appropriate. In 1991, an action item from the annual Committee meeting set in motion the review and revision of the water-quality objectives.

In 1993, the Committee approved changes in water-quality objectives recommended by the subcommittee that was formed in 1992 to review the objectives. The Committee also discussed the water-quality objectives for 5-year and 3-month flow-weighted concentrations for total dissolved solids and boron. Although the Committee agreed that calculation procedures to determine flow-weighted concentrations are time consuming and probably scientifically questionable, no consensus was reached on alternative objectives or procedures.

In 1997, the Committee agreed to suspend the monitoring and reporting of several parameters. The parameters affected were: dissolved aluminum, un-ionized ammonia, total chromium, dissolved copper, mercury in fish tissues, fecal coliform, and total coliform. The Committee also agreed to other minor revisions for clarification purposes. For example, changing the designation for pH from “natural” to “ambient”.

In 1999, the Committee replaced the term “discontinued” with “suspended” in Table 2.1.

In 2001, the Committee suspended the monitoring of dissolved mercury and total copper. This decision to suspend these parameters was based on data indicating concentrations or levels well below or within the objectives. Current objectives approved by the Committee are listed in Table 2.1.

The Committee also agreed to periodically review all suspended parameters.

Another responsibility of the Committee has included an ongoing exchange of data acquired through the monitoring programs. Exchanged data and reports are available for public viewing at the agencies of the participating governments or from Committee members.

## **2.4 Data Exchange**

The Committee is responsible for assuring exchange of data between governments. The exchange of monitoring information was initiated in the first quarter of 1981 and was an expansion of the informal quarterly exchange program initiated between the United States and Canada in 1976. Until 1991, data were exchanged on a quarterly basis. At the request of the Committee, the United States and Canada agreed to replace the quarterly exchange of data with an annual exchange effective at the beginning of the 1992 calendar year. Henceforth, data will be exchanged once each year as soon after the end of the calendar year as possible. However, unusual conditions or anomalous data will be reported and exchanged whenever warranted. No unusual conditions occurred during 2005 which warranted special reporting.

## **2.5 Water-Quality Monitoring Responsibilities**

Environment Canada has agreed to take responsibility of maintaining the continuous water-quality monitor installed at the East Poplar station at the International Boundary. The continuous water-quality monitor records daily conductance values which are used in the computation of TDS and boron values to monitor water quality in the East Poplar River. In the absence of water-quality samples, the Committee has agreed to utilize the data collected by the continuous water-quality monitor for its surface-water-quality monitoring program.

The USGS collects water-quality samples on a quarterly basis to supplement the daily conductance data collected by the continuous water-quality monitor.

**Table 2.1 Water-Quality Objectives**

<b>Parameter</b>	<b>Original Objective</b>	<b>Recommendation</b>	<b>Current Objective</b>
Boron, total	3.5/2.5 <sup>1</sup>	Continue as is	3.5/2.5 <sup>1</sup>
TDS	1,500/1,000 <sup>1</sup>	Continue as is	1,500/1,000 <sup>1</sup>
Aluminum, dissolved	0.1	Suspended*	---
Ammonia, un-ionized	0.02	Suspended*	---
Cadmium, total	0.0012	Continue as is	0.0012
Chromium, total	0.05	Suspended*	---
Copper, dissolved	0.005	Suspended*	---
Copper, total	1	Suspended*	---
Fluoride, dissolved	1.5	Continue as is	1.5
Lead, total	0.03	Continue as is	0.03
Mercury, dissolved	0.0002	Suspended*	---
Mercury, fish (mg/kg)	0.5	Suspended*	---
Nitrate	10	Continue as is	10
Oxygen, dissolved	4.0/5.0 <sup>2</sup>	Objective applies only during open water	4.0/5.0 <sup>2</sup>
SAR (units)	10	Continue as is	10
Sulfate, dissolved	800	Continue as is	800
Zinc, total	0.03	Continue as is	0.03
Water temperature (C)	30.0 <sup>3</sup>	Continue as is	30.0 <sup>3</sup>
pH (units)	6.5 <sup>4</sup>	Continue as is	6.5 <sup>4</sup>
Coliform (no./100 mL)			
Fecal	2,000	Suspended*	---
Total	20,000	Suspended*	---

Units in mg/L except as noted.

- Five-year average of flow-weighted concentrations (March to October) should be <2.5 boron, <1,000 TDS.  
Three-month average of flow-weighted concentration should be <3.5 boron and <1,500 TDS.
- 5.0 (minimum April 10 to May 15), 4.0 (minimum remainder of year - Fish Spawning).
- Natural temperature (April 10 to May 15), <30 degree Celsius (remainder of year)
- Less than 0.5 pH units above ambient, minimum pH=6.5.

\*Suspended after review of historic data found sample concentrations consistently below the objective. The Committee will periodically review status of suspended objectives.

### 3.0 WATER AND AIR: MONITORING AND INTERPRETATIONS

#### 3.1 Poplar River Power Station Operation

In 2005, the two 300-megawatt coal-fired units generated 4,345,960 gross megawatts (MW) of electricity. The average capacity factors for Unit No. 1 and 2 were 81.5 percent and 80.7 percent, respectively. The capacity factors are based on the maximum generating rating of 305 MW/h for both Unit No.1 and Unit No. 2. Similar to other years, scheduled maintenance was completed in the spring and fall of 2005.

#### 3.2 Surface Water

##### 3.2.1 Streamflow

Streamflow in the Poplar River basin was well below normal in 2005. The March to October recorded flow of the Poplar River at International Boundary, an indicator of natural flow in the basin, was 4,950 cubic decametres ( $\text{dam}^3$ ) (4,010 acre-feet), which was 48 percent of the 1931-2000 median seasonal flow of 10,290  $\text{dam}^3$  (8,340 acre-feet). A comparison of 2005 monthly mean discharge with the 1931-2000 median monthly mean discharge is shown in Figure 3.1.

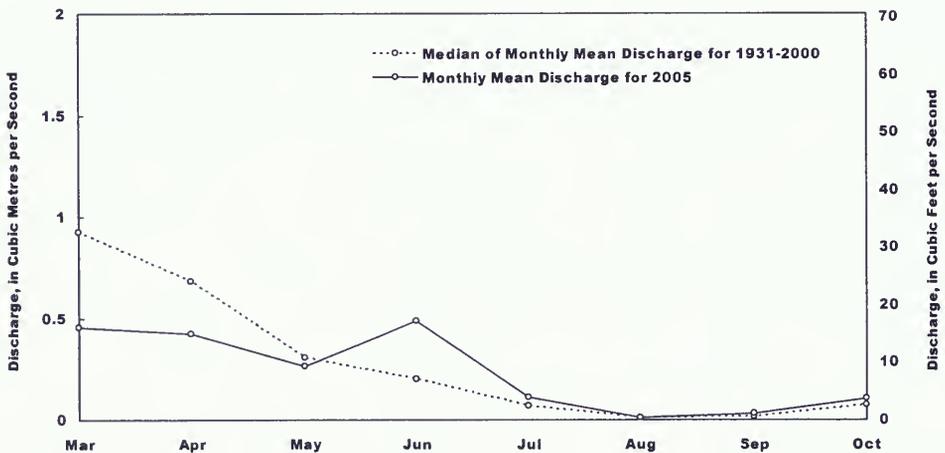


Figure 3.1 Discharge during 2005 as Compared with the Median Discharge from 1931-2000 for the Poplar River at International Boundary.

The 2005 recorded flow volume of the East Poplar River at International Boundary was 2,680 dam<sup>3</sup> (2,180 acre-feet). This volume is 90 percent of the median annual flow of 2,980 dam<sup>3</sup> (2,420 acre-feet) for 1976-2004 (since the completion of Morrison Dam).


### **3.2.2 Apportionment**

In 1976 the International Souris-Red Rivers Engineering Board, through its Poplar River Task Force, completed an investigation and made a recommendation to the Governments of Canada and the United States regarding the apportionment of waters of the Poplar River basin. Although the recommendation has not been officially adopted, the Province of Saskatchewan has adhered to the apportionment recommendation. Annex 3 contains the apportionment recommendation.

### **3.2.3 Minimum Flows**

The recorded volume of the Poplar River at International Boundary from March 1 to May 31, 2005 was 3,010 dam<sup>3</sup> (2,440 acre-feet). Based on IJC recommendations and the assumption that the recorded flow is the natural flow, the United States was entitled to a minimum discharge on the East Poplar River of 0.028 cubic metres per second (m<sup>3</sup>/s) (1.0 cubic feet per second (ft<sup>3</sup>/s)) for the period June 1, 2005 to May 31, 2006. The minimum flow for the period January 1 to May 31, 2005 was 0.028 m<sup>3</sup>/s (1.0 ft<sup>3</sup>/s), determined on the basis of the Poplar River flow volume for March 1 to May 31, 2004. A hydrograph for the East Poplar River at International Boundary and the minimum flow as recommended by the IJC are shown in Figure 3.2.

Daily flows during 2005 met or exceeded the minimum flow recommended by the IJC throughout the year except for several days (July 29; August 10, 23, 30, 31; September 4, 8, 13, 14) when daily flows were below the recommended minimum due to temporary damming of the stream by upstream beaver activity.

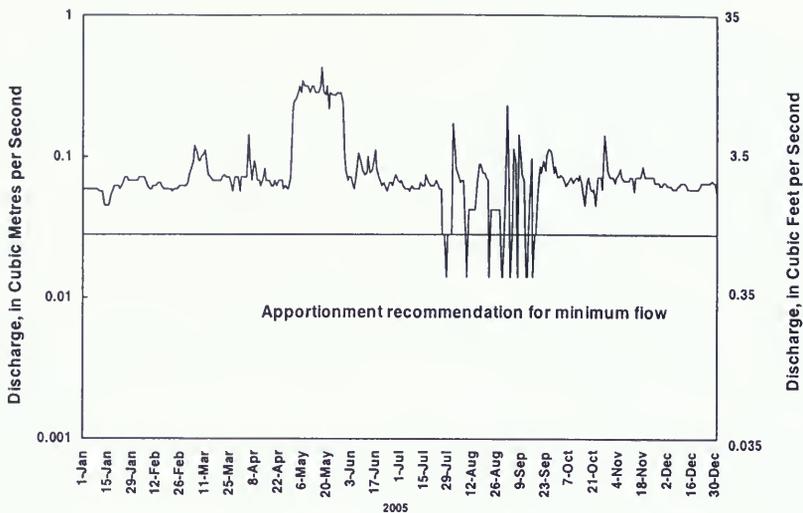

**Figure 3.2 Flow Hydrograph of the East Poplar River at International Boundary.**

### 3.2.4 On-Demand Release

In addition to the minimum flow, the IJC apportionment recommendation entitles Montana to an on-demand release to be delivered in the East Poplar River during the twelve-month period commencing June 1. Based on the runoff volume of 8,410 dam<sup>3</sup> (6,820 acre-feet) recorded at the Poplar River at International Boundary gauging station during the March 1 to May 31, 2004 period, Montana was entitled to an additional release of 617 dam<sup>3</sup> (500 acre-feet) from Cookson Reservoir during the succeeding twelve-month period commencing June 1, 2004. Montana requested this release to be made between May 1 and May 31, 2005. A volume of 678 dam<sup>3</sup> (550 acre-feet), in addition to the minimum flow, was delivered during this period. A hydrograph showing cumulative volume of the on-demand release request and on-demand release delivery made at the East Poplar River at International Boundary is shown in Figure 3.3.

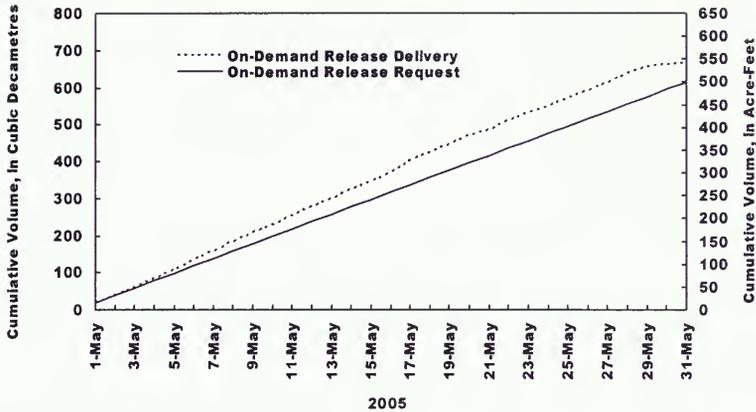


Figure 3.3 Cumulative Volume Hydrograph of On-Demand Release.

### 3.2.5 Surface-Water Quality

The 1981 report by the IJC to Governments recommended:

*For the March to October period, the maximum flow-weighted concentrations should not exceed 3.5 milligrams per litre (mg/L) for boron and 1,500 mg/L for TDS for any three consecutive months in the East Poplar River at the International Boundary. For the March to October period, the long-term average of flow-weighted concentrations should be 2.5 mg/L or less for boron, and 1,000 mg/L or less for TDS in the East Poplar River at the International Boundary.*

For the period prior to 1982, the three-month moving flow-weighted concentration (FWC) for boron and total dissolved solids (TDS) was calculated solely from monthly water-quality monitoring results. Since the beginning of 1982, the USGS has monitored specific conductance daily in the East Poplar River at the International Boundary, making it possible to derive boron and TDS concentration using a linear regression relationship with specific conductance.

In 2003, the Poplar River Bilateral Monitoring Committee decided to suspend much of the water-quality sampling program until it is warranted again. This suspension applied to all surface-water-quality sample collection activities by Environment Canada at the East Poplar River boundary station. The Committee has agreed to use the daily conductance data collected by the specific-conductance monitor as a surrogate for the monthly water-quality sampling program. Therefore, only four water-quality samples were collected for TDS and boron by the USGS in 2005. Hence, the three-month FWC for TDS and boron in 2005 were calculated using the two established equations (shown later in text) and the daily conductance data collected by the specific-conductance monitor installed at the East Poplar River at the International Boundary.

The Bilateral Monitoring Committee adopted the approach that, for the purpose of comparison with the proposed IJC long-term objectives, the boron and TDS data are best plotted as a five-year moving FWC which is advanced one month at a time.

Prior to 1988, long-term averages were calculated for a five-year period in which 2.5 years preceded and 2.5 years followed each plotted point. Beginning in 1988, the FWC was calculated from the 5-year period preceding each plotted point. For example, the FWC for December 2005 is calculated from data generated over the period December 2000 to December 2005. The calculations are based on the results of samples collected throughout the year, and are not restricted to only those collected during the months bracketing the period of irrigation (March to October) each year.

### **3.2.5.1 Total Dissolved Solids**

TDS is inversely related to streamflow at the East Poplar River at the International Boundary station. During periods of high runoff such as spring freshet, TDS decreases as the proportion of streamflow derived from ground water decreases. Conversely, during times of low streamflow (late summer, winter) the contribution of ground water to streamflow is proportionally greater. Because ground water has a higher ionic strength than the surface water entering the river, the TDS of the stream increases markedly during low-flow conditions.

Monthly average TDS concentrations derived from water-quality samples or the specific-conductance monitor readings are shown in Figure 3.4. The TDS concentrations in 2005 ranged from 770 mg/L on April 6 to 985 mg/L on October 15 which are below the proposed short-term objective of 1,500 mg/L. The three-month moving FWC for TDS for the period of record is presented in Figure 3.5. The TDS objectives have not been exceeded during the period of record. On inspection of the plot in Figure 3.5, it is apparent that the three-month moving FWC increased gradually, year by year, up until the spring runoff of 1997, when an exceptionally heavy snowmelt contributed sufficient water of low ionic strength to the river and the reservoir to dilute the accumulated salts built up in the system. Dissolved-solids concentrations in 2005 were similar to those recorded in 2004. In general, low spring runoff and higher contribution from ground water have kept the TDS level close to the long-term objective of 1,000 mg/L.

The five-year moving FWC for TDS (Figure 3.6) did not exceed the long-term objective of 1,000 mg/L in 2005. The maximum monthly FWC in 2005 was about 954 mg/L, which is slightly higher than the 2004 maximum monthly value of 935 mg/L.

The daily TDS values, as generated by linear regression from the daily specific-conductance readings, for the period January 1990 through December 2005 are shown in Figure 3.7. The data show an abrupt drop in TDS corresponding to the snowmelt runoff occurring during the spring of each year.

The relationship between TDS and specific conductance based upon data collected from 1974 to 2003 is as follows:

$$\text{TDS} = (0.624613813 \times \text{specific conductance}) + 35.1841527$$
$$(R^2 = 0.84, n = 617)$$

*Note: The above equation was used to derive the missing TDS water-quality sample data for 2005. These derived data are used in the current annual water-quality report.*

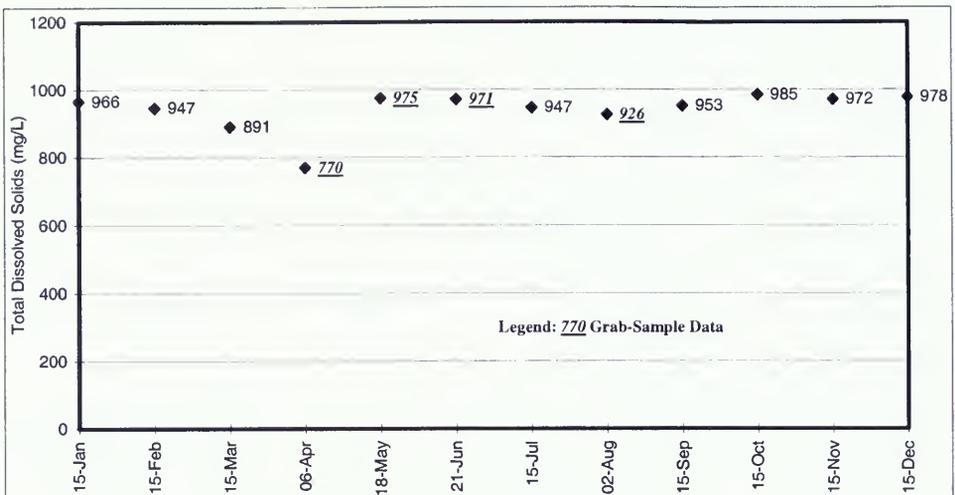


Figure 3.4: Monthly Mean TDS Concentration for 2005  
 Derived from Water-Quality Samples or Average Mid-Month Conductance Collected by Specific-Conductance Monitor at East Poplar River at the International Boundary

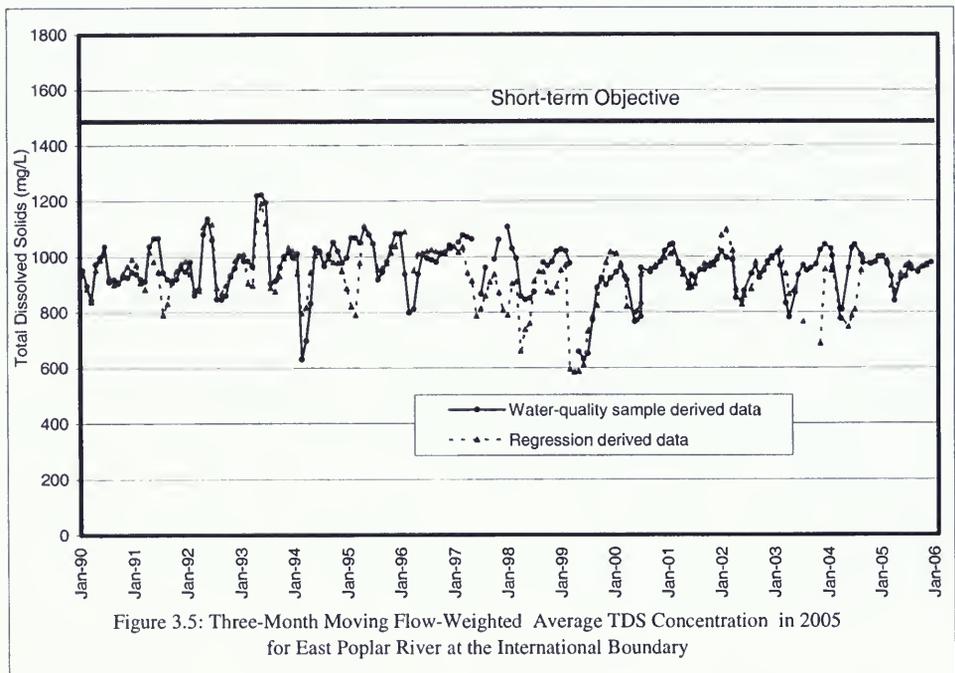


Figure 3.5: Three-Month Moving Flow-Weighted Average TDS Concentration in 2005 for East Poplar River at the International Boundary

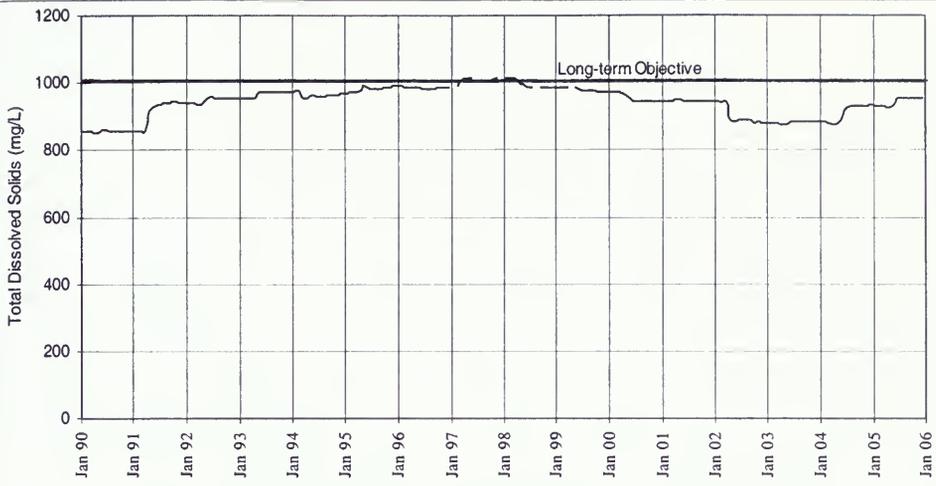


Figure 3.6: Five-Year Moving Flow-Weighted Average TDS Concentration in 2005 for East Poplar River at the International Boundary

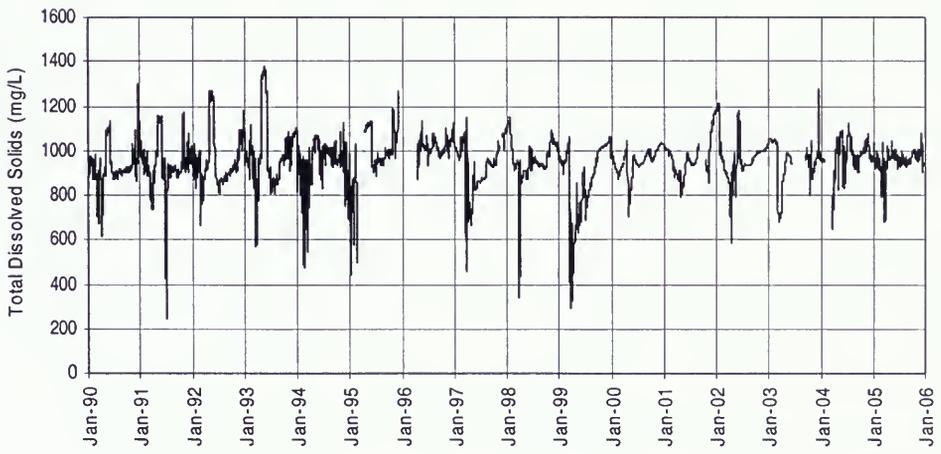


Figure 3.7: Daily TDS Concentration, 1990 to 2005; East Poplar River at the International Boundary (regression-derived data)

### 3.2.5.2 Boron

Similar to TDS, four water-quality samples were collected by the USGS for boron in 2005. Other boron data presented below were estimated using the boron equation that was developed from water-quality samples collected from 1974-2003 and the daily specific conductance data collected by the specific-conductance monitor. Figure 3.8 shows that during 2005, boron concentrations in the East Poplar at the International Boundary varied from 1.37 mg/L on April 6 to 1.97 mg/L on August 2.

The 3-month FWC for boron for the period of record is shown in Figure 3.9. The short-term objective of 3.5 mg/L has not been exceeded over the period 1975 to 2005. It can be seen that the data derived from water-quality samples and that derived from regression with specific conductance are similar, with the highs and lows in some degree of correspondence. This suggests that the regression generation for boron and TDS values is, in general terms, a valid procedure despite problems which arise from attempting to generate representative concentration and flow data for an entire month, based on a limited number of samples.

The 5-year moving FWC for boron displayed in Figure 3.10 remained well below the long-term objective of 2.5 mg/L.

Boron concentrations are not as well-correlated with specific conductance as TDS. Boron is a relatively minor ion, and does not in itself contribute to a large degree to the total load of dissolved constituents in the water. Accordingly, it appears likely that the standard deviation of dissolved boron (relative to the long-term mean boron concentration) may be greater than that of the major cations (sodium, potassium, and magnesium) and anions (sulphate, bicarbonate, and chloride) around their respective long-term mean concentrations. Daily boron concentrations for the period December 1990 to December 2005 are shown in Figure 3.11.

The relationship between boron and specific conductance applied to data collected from 1974 to 2003 is as follows:

$$\text{Boron} = (0.00129 \times \text{specific conductance}) - 0.04709$$
$$(R^2 = 0.57, n = 617)$$

*Note: The above equation was used to derive the missing boron water-quality sample data for 2005. These derived data are used in the current annual water-quality report.*

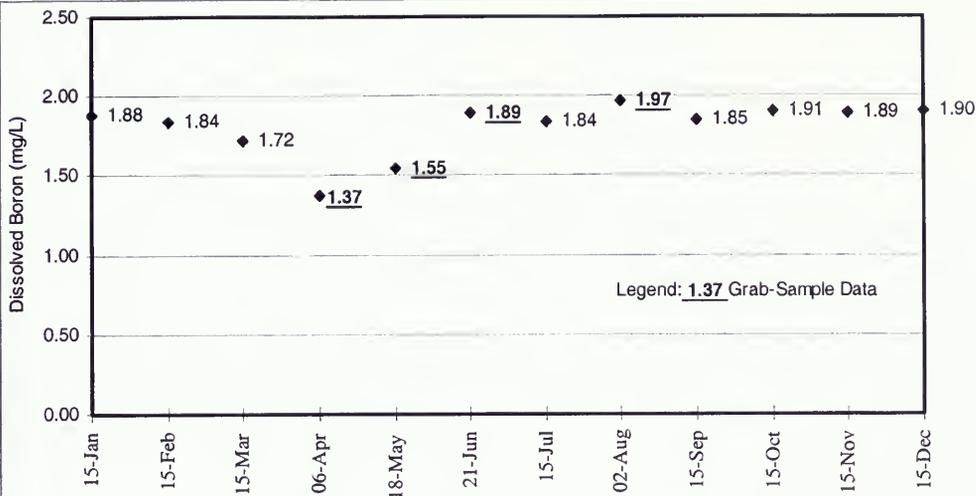


Figure 3.8: Monthly Mean Boron Concentration for 2005 - Derived from Water-Quality Samples or Average Mid-month Conductance Data Collected by Specific Conductance Monitor at East Poplar River at the International Boundary

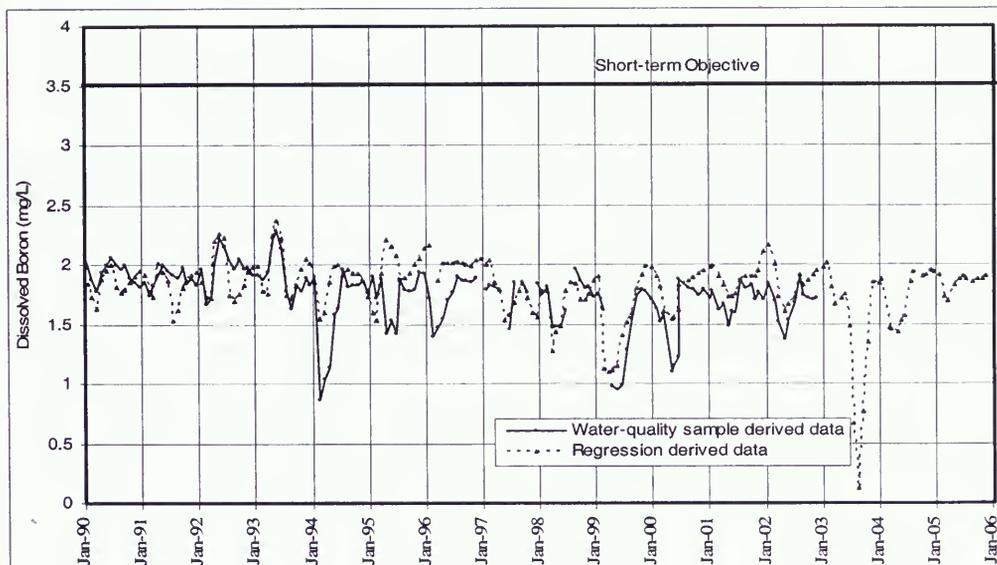


Figure 3.9: Three-Month Moving Flow-Weighted Average Boron Concentration in 2005 for East Poplar River at the International Boundary

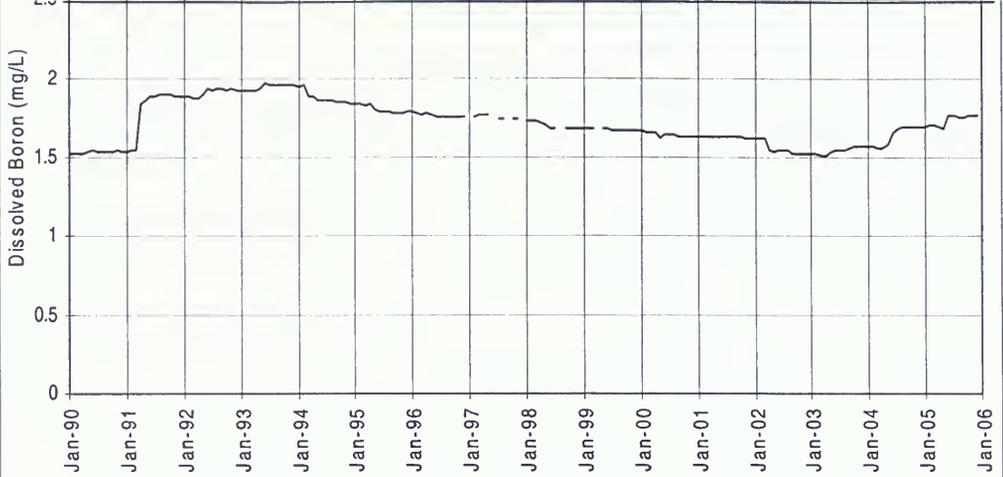


Figure 3.10: Five-Year Moving Flow-Weighted Average Boron Concentration for East Poplar River at the International Boundary (regression-derived data)

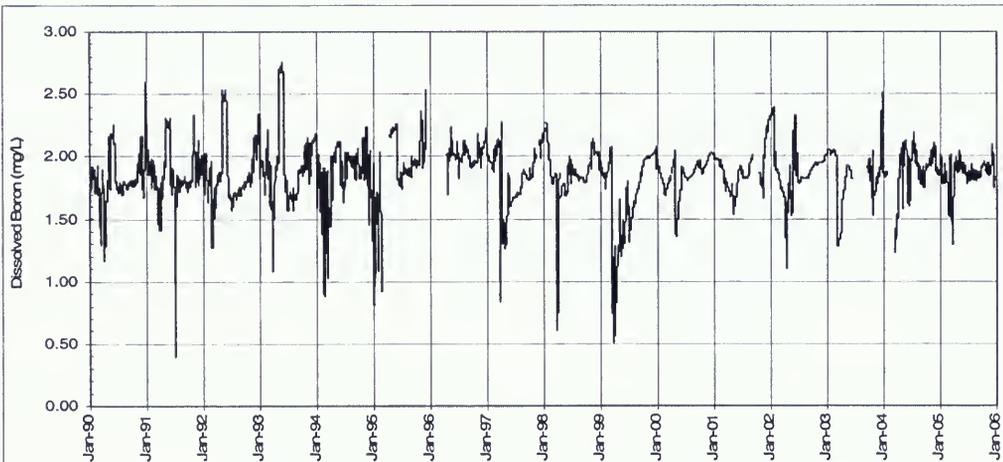


Figure 3.11: Daily Boron Concentration, 1990 to 2005, East Poplar River at the International Boundary (regression-derived data)

### 3.2.5.3 Other Water-Quality Objectives

Table 3.1 contains the multipurpose water-quality objectives for the East Poplar River at International Boundary, recommended by the International Poplar River Water Quality Board to the IJC. The table shows the number of samples collected for each parameter and the number of times over the course of the year that the objectives were exceeded. In the table, multiple replicate samples collected during the annual quality control exercise are treated as a single sample, but where an objective was exceeded in a replicate sample, this is charged against the single sample noted. As the table shows, all parameters were within the appropriate objectives.

**Table 3.1 Recommended Water-Quality Objectives and Excursions, 2005 Sampling Program, East Poplar River at International Boundary (units in mg/L, except as otherwise noted)**

Parameter	Objective	No. of Samples		Excursions
		USA	Canada	
<b>Objectives recommended by IJC to Governments</b>				
Boron, dissolved	3.5/2.5 (1)	4	0	0
Total Dissolved Solids	1,500/1,000 (1)	4	0	0
<b>Objectives recommended by Poplar River Bilateral Monitoring Committee to Governments</b>				
Cadmium, total	0.0012	4	0	0
Fluoride, dissolved	1.5	4	0	0
Lead, total	0.03	4	0	0
Nitrate	10.0	4	0	0
Oxygen, dissolved	4.0/5.0 (2)	4	0	0
Sodium adsorption ratio	10.0	4	0	0
Sulphate, dissolved	800.0	4	0	0
Zinc, total	0.03	4	0	0
Water temperature (Celsius)	30.0 (3)	4	0	0
pH (pH units)	6.5 (4)	4	0	0
<p>(1) Three-month average of flow-weighted concentrations should be &lt;3.5 mg/L boron and &lt;1,500 mg/L TDS. Five-year average of flow-weighted concentrations (March to October) should be &lt;2.5 mg/L boron and &lt;1,000 mg/L TDS.</p> <p>(2) 5.0 (minimum April 10 to May 15), 4.0 (minimum, remainder of the year).</p> <p>(3) Natural temperature (April 10 to May 15), &lt;30 degrees Celsius (remainder of the year).</p> <p>(4) Less than 0.5 pH units above natural, minimum pH = 6.5.</p>				

*Note: No exceedences were noted in 2005.*

### 3.3 Ground Water

#### 3.3.1 Operations – Saskatchewan

SaskPower's supplementary supply continued to operate during 2005. Normally the majority of ground-water production occurs from fall to spring in order to minimize water losses during the summer. However, in the past few years production has been maintained through the summer period. In 2005, 4,321 cubic decameters ( $\text{dam}^3$ ) of ground water was produced, which is down from the 4,764  $\text{dam}^3$  pumped in 2004. Production from 1991 to 2005 has averaged 4,840  $\text{dam}^3$  per year. Prior to 1991, the well network was part of a dewatering network for coal mining operations, which resulted in the high production levels experienced in the early to mid 1980 as shown in Figure 3.12. With the drought of the late 1980 and early 1990, it was evident that there was a continued need for ground water to supplement water levels in Cookson Reservoir. Consequently, the wells were taken over by SaskPower for use as a supplementary supply.


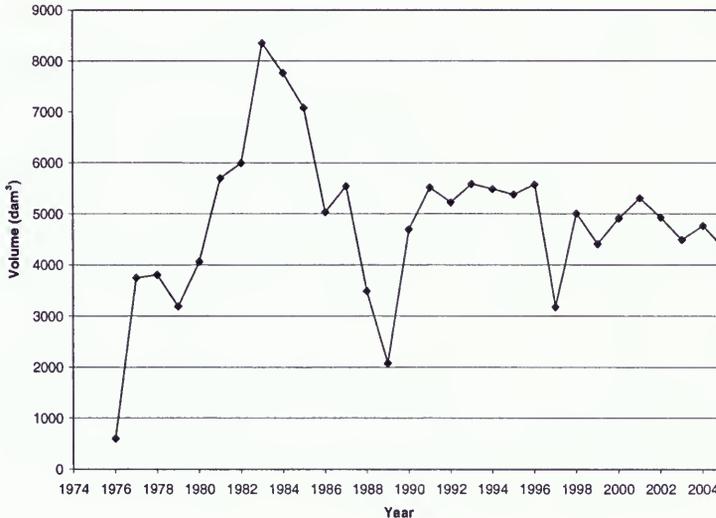


Figure 3.12 Supplementary Water Supply

SaskPower has an approval for the supplementary supply project to produce an annual volume of 5,500 dam<sup>3</sup>/year. The supplementary supply well network currently consists of 21 wells with a total of 10 discharge points. No wells were added or deleted from the well field during the year.

In addition to the supplementary supply, SaskPower also operates the Soil Salinity Project south of Morrison Dam. The project was initiated in 1989 to alleviate soil salinity which had developed below the dam. The salinity project consists of a network of production wells discharging into the cooling water canal. This in turn discharges to Cookson Reservoir. Ongoing operational difficulties with the salinity wells resulted in a continued decline in the annual volume pumped (Figure 3.13). However, a well rehabilitation program has been initiated and as a result production in 2005 was 790 dam<sup>3</sup>. This represents a significant increase from 557 dam<sup>3</sup> in 2004 and 426 dam<sup>3</sup> in 2003. The majority of water pumped came from wells on the east side of the river. The 2005 production level was still substantially lower than the peak production level of almost 1,100 dam<sup>3</sup> in 1994. In 2003 all production was from one well, but this increased to six wells in 2005. In 2006, one well will be decommissioned and an additional well will be rehabilitated.

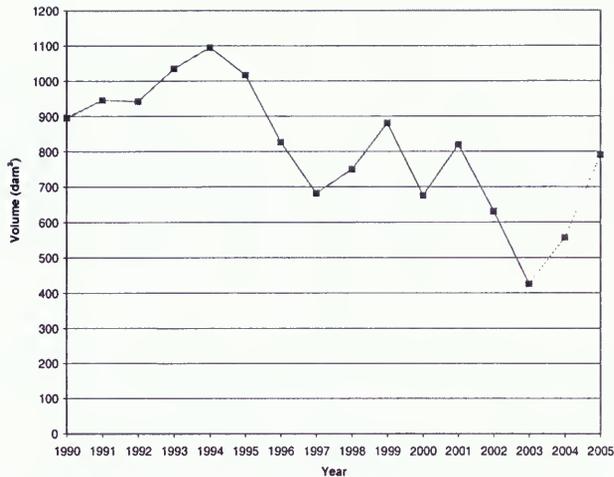

**Figure 3.13 Pumpage from Salinity Control Project**

### 3.3.2 Ground-Water Monitoring

Equivalent geologic formations present in Saskatchewan and Montana have different names. A list of the corresponding formation names is provided in Table 3.2.

**Table 3.2 Geologic Formation Name Equivalence between Saskatchewan and Montana**


Formation Location	Geologic Formation Name			
Saskatchewan	Eastend to Whitemud	Frenchman	Ravenscrag	Alluvium
Montana	Fox Hills	Hell Creek	Fort Union	Alluvium

### 3.3.2.1 Saskatchewan


In 2003, SaskPower reduced its monitoring network from 180 to about 85 piezometers. Saskatchewan Environment approved this reduction based on modelling studies undertaken by SaskPower.

The goal of the Salinity Project is to lower ground-water levels in the Empress sands below Morrison Dam two to three metres, which is roughly equivalent to pre-reservoir levels. Production from 1990 to 1995 ranged between 900 and 1,100 dam<sup>3</sup>/year and consequently the drawdown objectives were achieved in 1995 and 1996. Declining production from 1995 until 2004 resulted in a continual reduction in the cone of depression. By 2003 the drawdown cone of depression was negligible. The drawdown cone increased somewhat in 2004 and 2005 due to the increased production, but is still limited in extent and magnitude.

Figures 3.14 and 3.15 show hydrographs for Hart Coal seam monitoring wells near the International Boundary. These hydrographs illustrate that there have been no significant changes in water level in the Hart Coal seam near the boundary in the past 10 years.

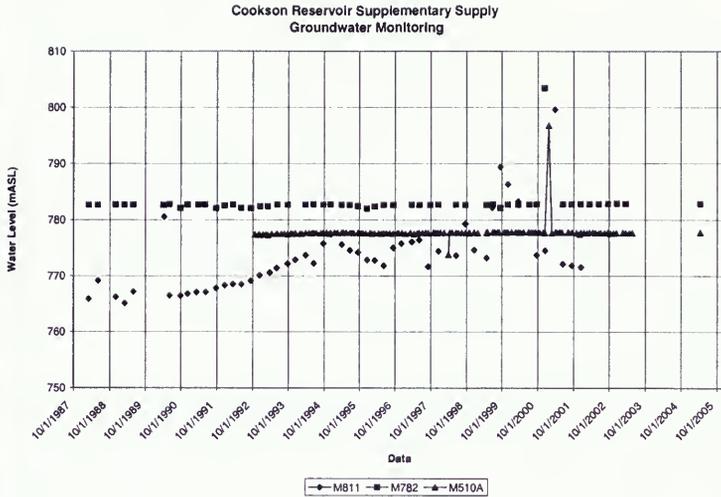

**Figure 3.14 Hydrograph of Selected Wells – Cookson Reservoir Supplementary Ground-water Monitoring Network**

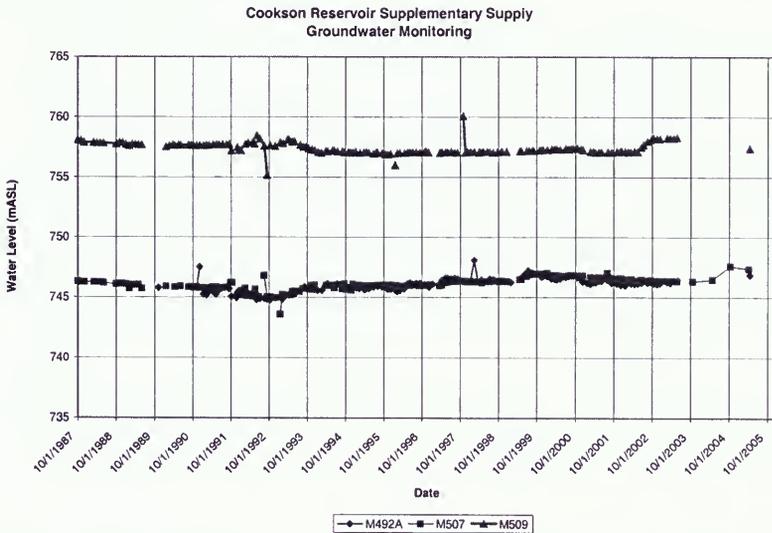

**Figure 3.15 Hydrograph of Selected Well – Cookson Reservoir Supplementary Supply Ground-water Monitoring Network**

### 3.3.2.2 Montana

Water levels in monitoring wells (6, 7, 9, 13, 16, 17, 19, and 22) that penetrate the Fort Union Formation and/or the Hart Coal Seam rose during 1997 and 1998, and then levelled off or fell between 1999 and the end of 2003. Heavy snow accumulation and subsequent melting caused water levels to rise to near record highs in wells 6, 7, 9, 16, 19, and 22 during 2004 and 2005. Water levels in all of these wells except well 9 declined during 2005. There appeared to be no short-term responses to the snow melt in wells 13 and 17, but water levels in these wells have slowly risen since late 2003. Hydrographs from selected Fort Union and Hart Coal Seam wells (6, 7, 17, and 19) are shown in Figure 3.16. Offsets noted in the legend have been applied to the data to separate the traces and make the hydrographs more readable. Hydrographs of selected Fort Union/Hart Coal Seam wells (6, 7, 17, and 19) are shown in Figure 3.16.


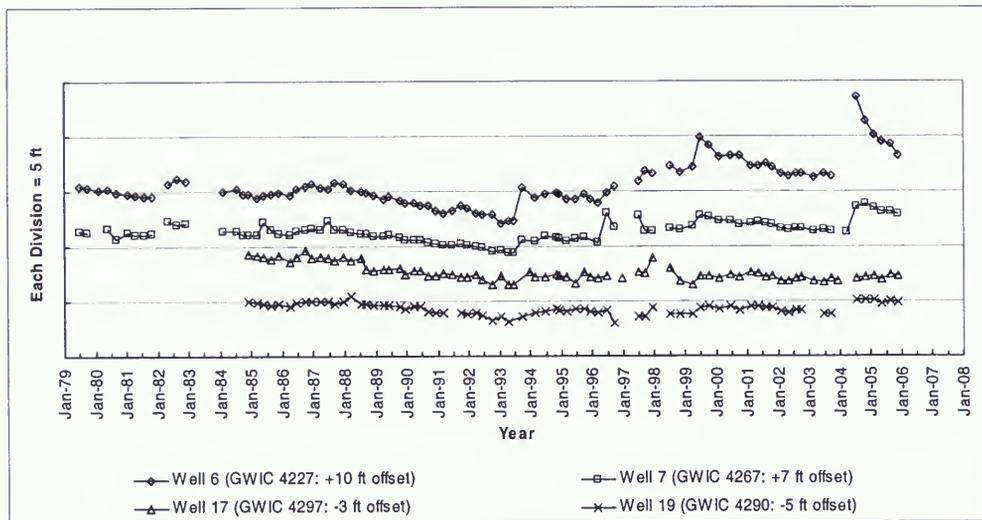


Figure 3.16 Hydrograph of Selected Wells - Fort Union and Hart Coal Aquifers

The potentiometric surface in the Fox Hills/Hell Creek artesian aquifer (well 11, Figure 3.17) has shown little fluctuation or change during the 1979-2005 monitoring period.

Water levels in monitoring wells (5, 8, 10, 23, and 24) that penetrate alluvium and/or outwash show seasonal change caused by climate and/or precipitation. Water levels in all of the wells responded to the heavy snow accumulation and melt in early 2004. Water levels in well 23 dropped back to late 2003 levels by the end of 2004 and water levels in wells 10 and 24 returned to pre-melt elevations in 2005. Water levels in wells 5 and 8 remain above elevations observed in 2002-2003. Hydrographs from selected alluvial wells (10, 23, and 24) and the Fox Hills/Hell Creek well (11) are shown in Figure 3.17. Offsets noted in the legend have been applied to the data to separate the traces and make the hydrographs more readable. Measurements from wells 11 and 24 where the wellhead was noted as being frozen are not included.

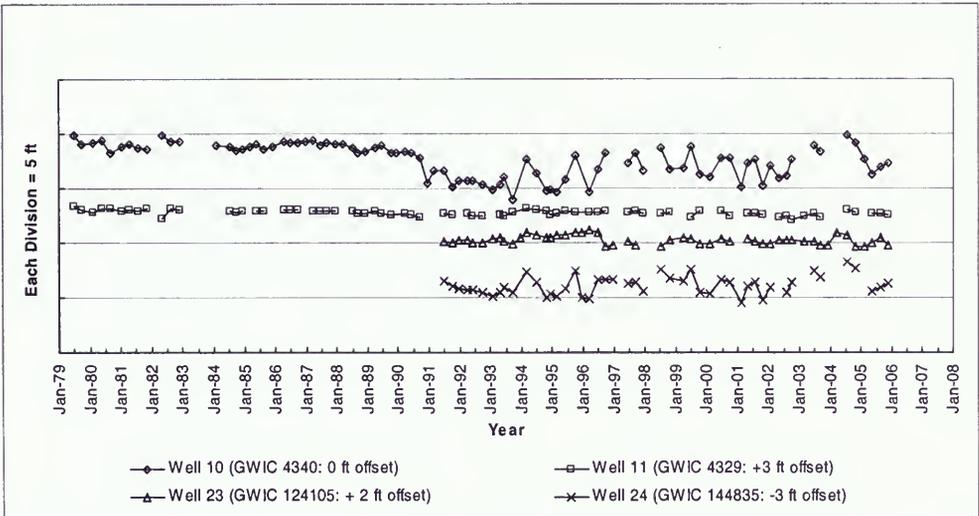

**Figure 3.17 Hydrograph of Selected Wells - Alluvium and Fox Hills/Hell Creek Aquifers**

### 3.3.3 Ground-Water Quality

#### 3.3.3.1 Saskatchewan

The water quality from the Supplementary Supply Project discharge points has been consistent with no trends indicated. A summary of the more frequently tested parameters during 2005 is provided in Table 3.3. Result averages for the 1992-2004 period are also included in this table for comparison.

**TABLE 3.3 Water-Quality Statistics for Water Pumped from Supplementary Water Supply Project Wells\***

	1992 to 2005 Average	2005 Average
pH (units)	8.0	8.2
Conductivity ( $\mu\text{s}/\text{cm}$ )	1,301	1,280
Total Dissolved Solids	900	800
Total Suspended Solids	12	16
Boron	1.2	1.1
Sodium	177	166
Cyanide ( $\mu\text{g}/\text{L}$ )	0.0007	<0.000001
Iron	0.2	0.3
Manganese	0.1	0.1
Mercury ( $\mu\text{g}/\text{L}$ )	0.09	<0.05
Calcium	71	53
Magnesium	51	60
Sulfate	269	290
Nitrate	.06	0.04

All units mg/L unless otherwise noted. \*Sampled at Site "C3" on Girard Creek. <, less than.

Average results from the common discharge point for the Salinity Control Project for 2005, plus an average of the 1992-2004 results are provided in Table 3.4. Results have remained relatively consistent since 1992.

**TABLE 3.4 Water-Quality Statistics for Water Pumped from Salinity Control Project Wells Sampled at the Discharge Pipe\***

	1992-2005 Average	2005 Average
pH (units)	7.5	7.7
Conductivity ( $\mu\text{s}/\text{cm}$ )	1,434	1,492
Total Dissolved Solids	991	1,011
Boron	1.6	1.6
Calcium	104	94
Magnesium	60	52
Sodium	152	170
Potassium	7.4	7.3
Arsenic ( $\mu\text{g}/\text{L}$ )	11.4	10.2
Aluminum	0.07	<0.01
Barium	0.037	0.026
Cadmium	0.019	<0.001
Iron	4.1	3.7
Manganese	0.13	0.12
Molybdenum	0.019	<0.001
Strontium	1.774	1.5
Vanadium	0.018	<0.001
Uranium ( $\mu\text{g}/\text{L}$ )	0.513	0.9
Mercury ( $\mu\text{L}$ )	0.09	<0.05
Sulfate	321	290
Chloride	6.3	8
Nitrate	0.005	<0.01

\*All concentrations are mg/L unless otherwise noted. <, less than.

Leachate movement through the ash lagoon liner systems can potentially affect ground-water quality in the vicinity of the ash lagoons. The piezometers listed in the Technical Monitoring Schedules are used to assess leachate movement and calculate seepage rates. Piezometric water level, boron, and chloride are the chosen indicator parameters to assess leachate movement.

The ground-water monitoring program was expanded in 1994 as a result of Ash Lagoon # 3 South construction. In total 20 new pneumatic piezometers and 28 new standpipe piezometers were completed within their target zones. Testing of these piezometers began in 1995. The limited data so far does not show any unusual or unexpected values.

Due to the sampling reduction approved by Sask Environment in late 2003 there are some piezometers that are no longer monitored. Of the piezometers previously referenced in this report piezometers C867A, C868A, C871A, C886A, C887A, C868B, C869C, C766, and C767 are no longer monitored.

The chemistry of water immediately above the liner systems is expected to differ from the surface water of the lagoons. Meaningful information is only available from piezometers installed within Ash Lagoon # 1 where ash has been deposited for many years. Future monitoring of all piezometers completed above the lagoon liner systems will continue with the purpose of confirming the boron trend noted above and to improve the understanding of leachate quality and flow from the ash lagoons.

The piezometric surface measurements for the oxidized till continue to show the presence of a ground-water mound beneath the ash lagoons. The mound extends from the center of the Ash Lagoon # 1 to the southeast side of Ash Lagoon # 2. Isolated ground-water mounds have developed within the area of the oxidized ground-water mound. Piezometers located in the oxidized till suggest limited leachate activity. No seepage activity is evident in the unoxidized till.

The greatest changes in chloride and boron concentrations within the oxidized till have occurred where piezometric levels have changed the most. Although increasing water levels do not automatically suggest that the water affecting the piezometers is leachate, changing piezometric levels do suggest ground-water movement. On the west side of the Polishing Pond, the boron levels have changed only

slightly in the oxidized till piezometers C728A and C728D, where the chloride levels have changed more significantly. The chloride level for C728A has decreased from 403 mg/L in 1983 to 232 mg/L in 2004. The chloride level for C728D has increased from 185 mg/L in 1983 to 376 mg/L in 2004. Although these piezometers are close in proximity and installed at the same level, they are being influenced by different water. Chloride results for C728A suggest initial seepage and it is to be expected that over time the same observation will be seen in C728D.

The piezometric surface of the Empress Gravel indicates a regional flow from northwest to southeast below Morrison Dam. As a general observation, Empress piezometers respond to changing reservoir levels. Results for the Empress layer do not indicate seepage activity with the majority of the analyses showing little real change in boron or chloride results.

Sand lens piezometers C712B and C766 are located between the polishing pond and the cooling water canal. C767 is located on the top of dyke G and C766 and C712B are located at the toe of dyke G. These piezometers have historically been of interest as the sand lens provides a preferential pathway for leachate migration of boron concentrations. C766 shows an increasing trend up to October 1988 with a peak of 43.0 mg/L in April 1995. Since 1995 the boron levels have declined modestly and have remained between 25 and 38 mg/L.

Up to April 1988, the boron concentration for C767 was increasing and peaked at 49.4 mg/L. Since this peak, the boron concentration steadily decreased to the end of 1991 where it levelled off near 5 mg/L and has since remained with one exception, a concentration of 11.7 mg/L in October 2000.

Piezometer C712B has been monitored for several years. Historically, boron levels were below 1 mg/L. From 1992 to 2005, boron levels have remained relatively steady around between 12 and 20 mg/L.

### 3.3.3.2 Montana

Samples were collected from monitoring wells 7, 16, and 24 during 2005. Well 7 is completed in Hart Coal, well 16 is completed in the Fort Union Formation, and well 24 is completed in alluvium. TDS concentrations in samples collected in 2005 from wells 7 and 24 were less than reported in 2004 and similar to those observed in 2003. Changes in TDS with time for wells 7, 16, and 24 are shown in Figure 3.18.

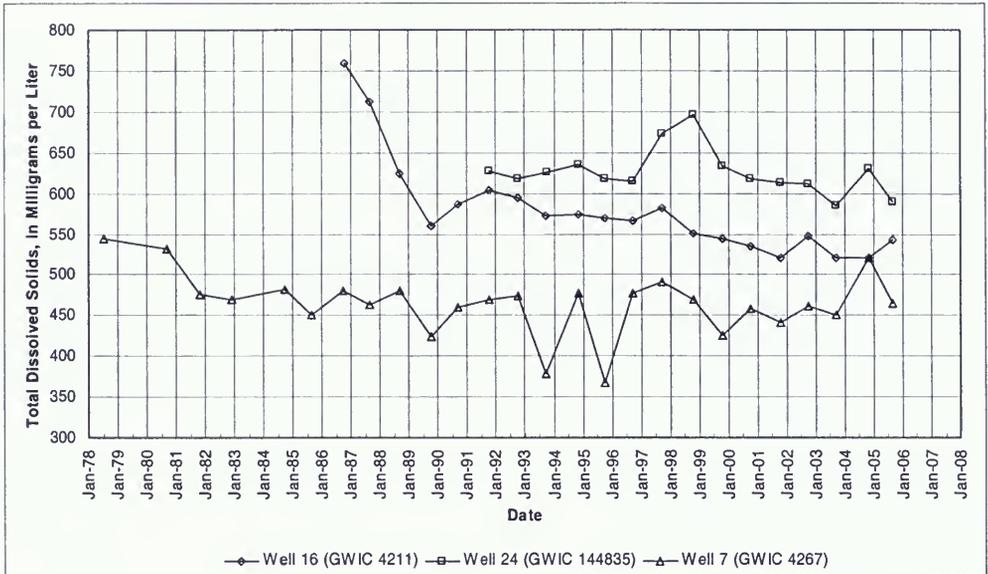


Figure 3.18 Total Dissolved Solids in Samples from Montana Wells.

### **3.4 Cookson Reservoir**

#### **3.4.1 Storage**

On January 1, 2005, Cookson Reservoir storage was 38,420 dam<sup>3</sup> or 89 % of the full supply volume. The 2005 maximum, minimum, and period elevations and volumes are shown in Table 3.5.


Spring inflows into the reservoir were well below normal in 2005. A release was made in May to meet the recommended Poplar River basin demand release for the 2004-2005 apportionment year. No releases were required to maintain the recommended apportionment target flow at the International Boundary for the remainder of the year.

In addition to runoff, reservoir levels were augmented by ground-water pumping. Wells in the abandoned west block mine site supplied 4,321 dam<sup>3</sup> to Girard Creek. It is estimated that less than 70% of this flow volume reached Cookson Reservoir. Wells in the soil salinity project area supplied 790 dam<sup>3</sup> in 2005.

**Table 3.5 Cookson Reservoir Storage Statistics for 2005**

Date	Elevation (m)	Contents (dam <sup>3</sup> )
January 1	752.34	38,420
April 10 (Maximum)	752.49	39,520
November 27 (Minimum)	751.58	33,060
December 31	751.61	33,250
Full Supply Level	753.00	43,410

The Poplar River Power Station is dependent on water from Cookson Reservoir for cooling. Power plant operation is not adversely affected until reservoir levels drop below 749.0 metres. The dead storage level for cooling water used in the generation process is 745.0 metres. The 2005 recorded levels and associated operating levels are shown in Figure 3.19.

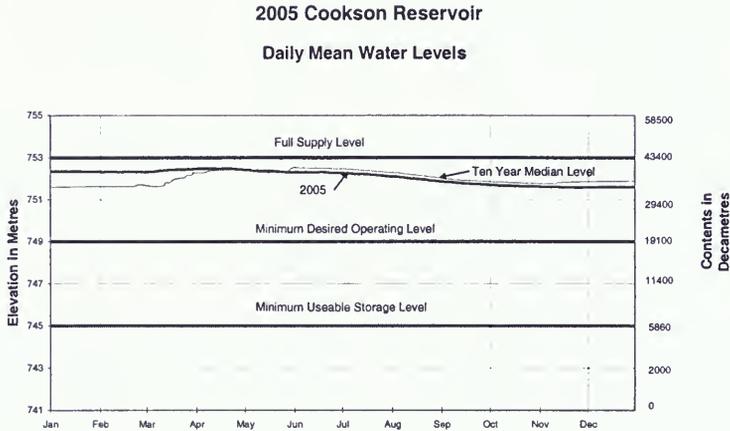

**Figure 3.19 Cookson Reservoir Daily Mean Water Levels for 2005 and Median Daily Water Levels, 1995-2004**

### 3.4.2 Water Quality

The period from 1987 to 1993 saw very low volumes of surface-water runoff to Cookson Reservoir. Consequently, total dissolved solids (TDS) in the reservoir increased steadily from approximately 780 mg/L to over 1,800 mg/L. Since 1993, higher runoff volumes have improved reservoir water quality. Since 1997, the TDS levels in the reservoir have generally remained below 1,000 mg/L. The average TDS level in Cookson Reservoir in 2005 was 1,033 mg/L, up slightly from the 2004 average level of 967 mg/L but still below past levels.

### 3.5 Air Quality

SaskPower's ambient SO<sub>2</sub> monitoring for 2005 recorded no values greater than Saskatchewan Environment's one-hour average standard of 0.17 ppm and the 24-hour average standard of 0.06 ppm. The ambient SO<sub>2</sub> monitor was replaced in January 2001 which has greatly improved the availability of this information. The 2005 geometric mean for the high-volume suspended-particulate sampler was 14.5µg/m<sup>3</sup> and 2005 was the fourteenth consecutive year of below-average standard particulate readings.

### 3.6 Quality Control

#### 3.6.1 Streamflow

Current-meter discharge measurements were made at the East Poplar River at International Boundary site on September 6, 2005 by personnel from the U.S. Geological Survey (USGS) and Environment Canada (EC) to confirm streamflow measurement comparability. Data from the two current-meter discharge measurements are available in Table 3.6.

**Table 3.6 Streamflow Measurement Results for September 6, 2005**

Agency	Time CST	Width (m)	Mean Area (m <sup>2</sup> )	Velocity (m/s)	Gauge Height (m)	Discharge (m <sup>3</sup> /s)
EC	0935	1.05	0.130	0.225	1.743	0.030
USGS	1026	1.04	0.121	0.240	1.743	0.029

#### 3.6.2 Water Quality

Quality-control sampling was not performed in 2005 at the East Poplar River at International Boundary due to suspension in collection of surface-water-quality samples by Environment Canada.



ANNEX 1

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

CANADA-UNITED STATES



POPLAR RIVER COOPERATIVE MONITORING ARRANGEMENT

I. PURPOSE

This Arrangement will provide for the exchange of data collected as described in the attached Technical Monitoring Schedules in water-quality, water quantity and air quality monitoring programs being conducted in Canada and the United States at or near the International Boundary in response to SaskPower development. This Arrangement will also provide for the dissemination of the data in each country and will assure its comparability and assist in its technical interpretation.

The Arrangement will replace and expand upon the quarterly information exchange program instituted between Canada and the United States in 1976.

II. PARTICIPATING GOVERNMENTS

Governments and government agencies participating in the Arrangement are:

Government of Canada: Environment Canada

Government of the Province of Saskatchewan:

Saskatchewan Environment and Resource Management

Government of the United States of America: United States Geological Survey

Government of the State of Montana: Executive Office

III. POPLAR RIVER MONITORING COMMITTEE: TERMS OF REFERENCE

A binational committee called the Poplar River Bilateral Monitoring Committee will be established to carry out responsibilities assigned to it under this Arrangement. The Committee will operate in accordance with the following terms of reference:

## A. Membership

The Committee will be composed of four representatives, one from each of the participating Governments. It will be jointly chaired by the Government of Canada and the Government of the United States. There will be a Canadian Section and a United States Section. The participating Governments will notify each other of any changes in membership on the Committee. Co-chairpersons may by mutual agreement invite agency technical experts to participate in the work of the Committee.

The Governor of the State of Montana may also appoint a chief elective official of local government to participate as an ex-officio member of the Committee in its technical deliberations. The Saskatchewan Minister of the Environment may also appoint a similar local representative.

## B. Functions of the Committee

The role of the Committee will be to fulfil the purpose of the Arrangement by ensuring the exchange of monitored data in accordance with the attached Technical Monitoring Schedules, and its collation and technical interpretation in reports to Governments on implementation of the Arrangement. In addition, the Committee will review the existing monitoring systems to ensure their adequacy and may recommend to the Canadian and United States Governments any modifications to improve the Technical Monitoring Schedules.

### 1. Information Exchange

Each Co-chairperson will be responsible for transmitting to his counterpart Co-chairperson on a regular, and not less than quarterly basis, the data provided by the cooperative monitoring agencies in accordance with the Technical Monitoring Schedules.

## 2. Reports

- (a) The Committee will prepare a joint Annual Report to the participating governments, and may at any time prepare joint Special Reports.
- (b) Annual Reports will
  - i) summarize the main activities of the Committee in the year under Report and the data which has been exchanged under the Arrangement;
  - ii) draw to the attention of the participating governments any definitive changes in the monitored parameters, based on collation and technical interpretation of exchanged data (i.e. the utilization of summary, statistical and other appropriate techniques);
  - iii) draw to the attention of the participating governments any recommendations regarding the adequacy or redundancy of any scheduled monitoring operations and any proposals regarding modifications to the Technical Monitoring Schedules, based on a continuing review of the monitoring programs including analytical methods to ensure their comparability.
- (c) Special Reports may, at any time, draw to the attention of participating governments definitive changes in monitored parameters which may require immediate attention.
- (d) Preparation of Reports

Reports will be prepared following consultation with all committee members and will be signed by all Committee members. Reports will be separately forwarded by the Committee Co-chairmen to the participating governments. All annual and special reports will be so distributed.

### 3. Activities of Canadian and United States Sections

The Canadian and United States section will be separately responsible for:

- (a) dissemination of information within their respective countries, and the arrangement of any discussion required with local elected officials;
- (b) verification that monitoring operations are being carried out in accordance with the Technical Monitoring Schedules by cooperating monitoring agencies;
- (c) receipt and collation of monitored data generated by the cooperating monitoring agencies in their respective countries as specified in the Technical Monitoring Schedules;
- (d) if necessary, drawing to the attention of the appropriate government in their respective countries any failure to comply with a scheduled monitoring function on the part of any cooperating agency under the jurisdiction of that government, and requesting that appropriate corrective action be taken.

#### IV. PROVISION OF DATA

In order to ensure that the Committee is able to carry out the terms of this Arrangement, the participating governments will use their best efforts to have cooperating monitoring agencies, in their respective jurisdictions provide on an ongoing basis all scheduled monitored data for which they are responsible.

#### V. TERMS OF THE ARRANGEMENT

The Arrangement will be effective for an initial term of five years and may be amended by agreement of the participating governments. It will be subject to review at the end of the initial term and will be renewed thereafter for as long as it is required by the participating governments.

ANNEX 2

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2006

CANADA-UNITED STATES



## TABLE OF CONTENTS

PREAMBLE	A2 - 5
<u>CANADA</u>	
STREAMFLOW MONITORING	A2 - 8
SURFACE-WATER-QUALITY MONITORING	A2 - 10
GROUND-WATER PIEZOMETERS TO MONITOR POTENTIAL DRAWDOWN DUE TO COAL-SEAM DEWATERING NEAR THE INTERNATIONAL BOUNDARY	A2 - 14
GROUND-WATER PIEZOMETER MONITORING - POWER STATION AREA	A2 - 16
GROUND-WATER PIEZOMETER MONITORING - ASH LAGOON AREA	
WATER LEVEL	A2 - 18
WATER QUALITY	A2 - 19
AMBIENT AIR-QUALITY MONITORING	A2 - 22
<u>UNITED STATES</u>	
STREAMFLOW MONITORING	A2 - 26
SURFACE-WATER-QUALITY MONITORING	A2 - 28
GROUND-WATER-QUALITY MONITORING	A2 - 30
GROUND-WATER LEVELS TO MONITOR POTENTIAL DRAWDOWN DUE TO COAL-SEAM DEWATERING	A2 - 32



## PREAMBLE

The Technical Monitoring Schedule lists those water quantity, water-quality and air quality monitoring locations and parameters which form the basis for information exchange and reporting to Governments. The structure of the Committee responsible for ensuring the exchange takes place is described in the Poplar River Cooperative Monitoring Arrangement.

The monitoring locations and parameters listed herein have been reviewed by the Poplar River Bilateral Monitoring Committee and represent the basic technical information needed to identify any definitive changes in water quantity, water quality and air quality at the International Boundary. The Schedule was initially submitted to Governments for approval as an attachment to the 1981 report to Governments. Changes in the sampling locations and parameters may be made by Governments based on the recommendations of the Committee.

Additional information has been or is being collected by agencies on both sides of the International Boundary, primarily for project management or basin-wide baseline data purposes. This additional information is usually available upon request from the collecting agency and forms part of the pool of technical information which may be drawn upon by Governments for specific study purposes. Examples of additional information are water-quantity, water-quality, ground-water and air-quality data collected at points in the Poplar River basin not of direct concern to the Committee. In addition, supplemental information on parameters such as vegetation, soils, fish and waterfowl populations and aquatic vegetation has been collected on either a routine or specific-studies basis by various agencies.



POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2006

CANADA



## STREAMFLOW MONITORING


Daily mean discharge or levels and instantaneous monthly extremes as normally published in surface-water-data publications.

Responsible Agencies: Environment Canada; Saskatchewan Watershed Authority		
No. on Map	Station No.	Station Name
1*	11AE003 (06178500)	East Poplar River at International Boundary
2	11AE013***	Cookson Reservoir near Coronach
3	11AE015***	Girard Creek near Coronach Cookson Reservoir
4	11AE014***	East Poplar River above Cookson Reservoir
5		Fife Lake Overflow**
6*	11AE008 (06178000)	Poplar River at International Boundary

\* International gauging station.

\*\* Miscellaneous measurements of outflow to be made by Saskatchewan Watershed Authority (SWA) during periods of outflow only.

\*\*\* SWA took over the monitoring responsibility effective July 1/92.

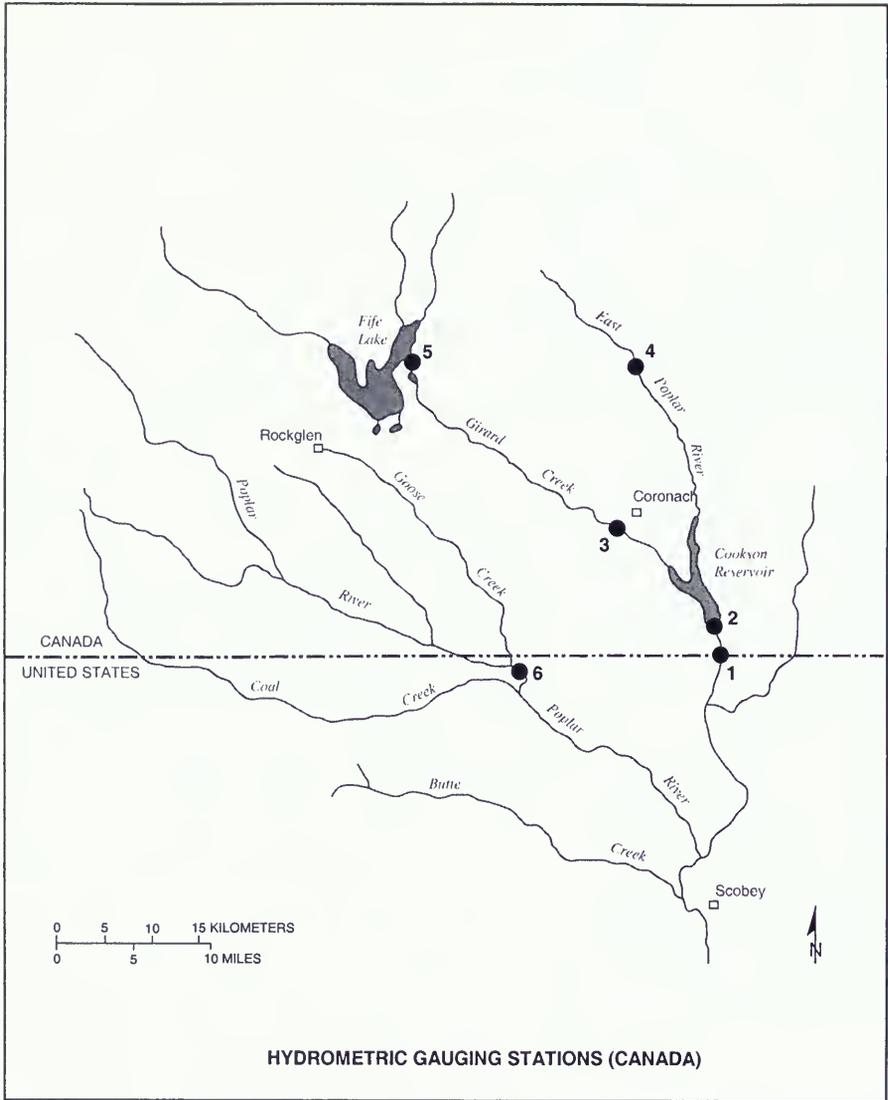


## SURFACE-WATER-QUALITY MONITORING

### Sampling Locations

<b>Responsible Agency: Environment Canada</b>		
No. on Map	Station No.	Station Name
1	00SA11AE0008 Suspended	East Poplar River at International Boundary

<b>Responsible Agency: Saskatchewan Environment</b>		
<b>Data collected by: Sask Power</b>		
No. on Map	Station No.	Station Name
2	12386 Discontinued	East Poplar River at Culvert immediately below Cookson Reservoir
3	12368	Cookson Reservoir near Dam
4	12377 Discontinued	Upper End of Cookson Reservoir at Highway 36
5	12412 Discontinued	Girard Creek at Coronach, Reservoir Outflow
6	7904	Fife Lake Outflow *

\*Sampled only when outflow occurs for a 2-week period, which does not occur every year.

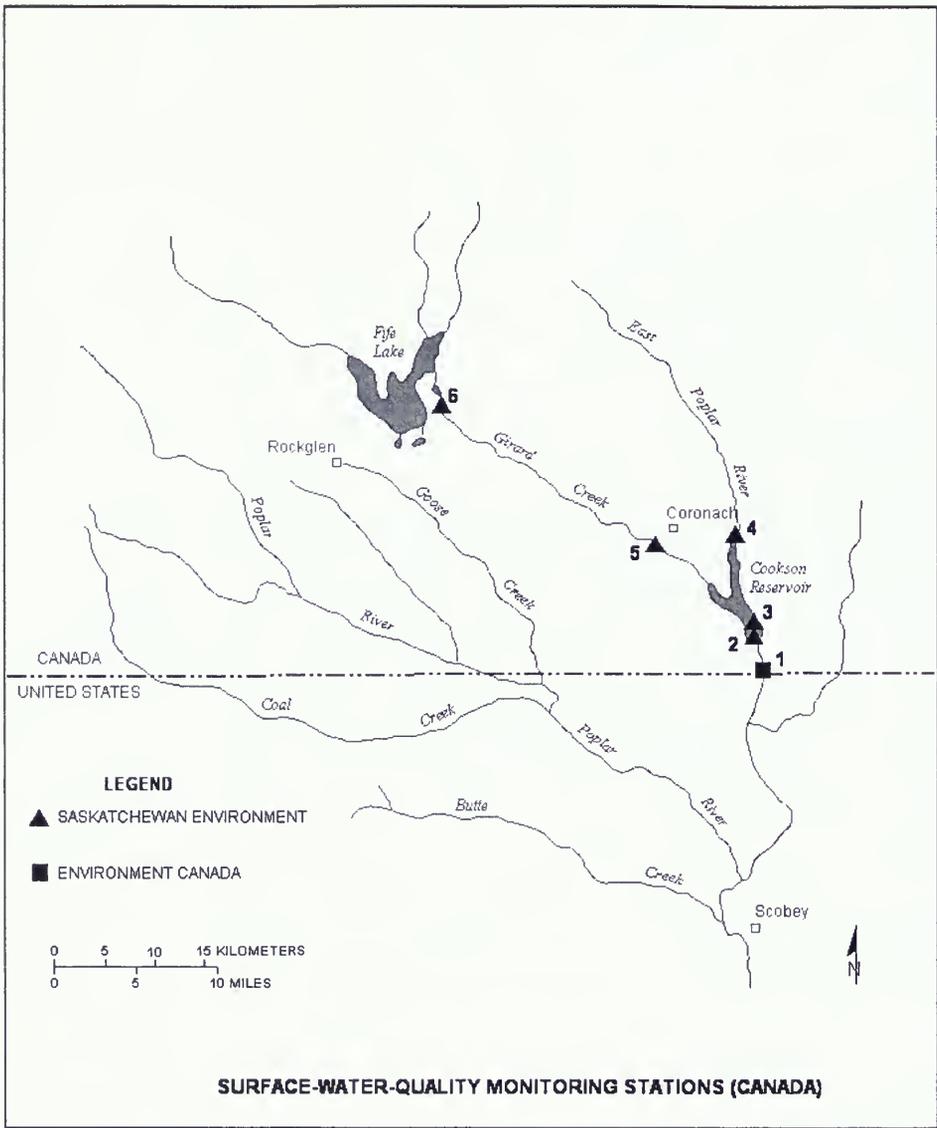

# PARAMETERS

Responsible Agency: Environment Canada			
ENVIRODAT* Code	Parameter	Analytical Method	Sampling Frequency Station No. 1
10151	Alkalinity-phenolphthalein	Potentiometric Titration	SUS
10111	Alkalinity-total	Potentiometric Titration	SUS
13102	Aluminum-dissolved	AA-Direct	SUS
13302	Aluminum-extracted	AA-Direct	SUS
07540	Ammonia-total	Automated Colourimetric	SUS
33108	Arsenic-dissolved	ICAP-hydride	SUS
36601	Barium-total	AA-Direct	SUS
06201	Bicarbonates	Calculated	SUS
05211	Boron-dissolved	ICAP	SUS
96360	Bromoxynil	Gas Chromatography	SUS
48002	Cadmium-total	AA Solvent Extraction	SUS
20103	Calcium	AA-Direct	SUS
06104	Carbon-dissolved organic	Automated IR Detection	SUS
06901	Carbon-particulate	Elemental Analyzer	SUS
06002	Carbon-total organic	Calculated	SUS
06301	Carbonates	Calculated	SUS
17206	Chloride	Automated Colourimetric	SUS
06717	Chlorophyll a	Spectrophotometric	SUS
24003	Chromium-total	AA-Solvent Extraction	SUS
27002	Cobalt-total	AA-Solvent Extraction	SUS
36012	Coliform-fecal	Membrane Filtration	SUS
36002	Coliform-total	Membrane Filtration	SUS
02021	Colour	Comparator	SUS
02041	Conductivity	Wheatstone Bridge	SUS
06610	Cyanide	Automated UV-Colourimetric	SUS
09117	Fluoride-dissolved	Electrometric	SUS
06401	Free Carbon Dioxide	Calculated	SUS
10602	Hardness	Calculated	SUS
17811	Hexachlorobenzene	Gas Chromatography	SUS
08501	Hydroxide	Calculated	SUS
26104	Iron-dissolved	AA-Direct	SUS
82002	Lead-total	AA-Solvent Extraction	SUS
12102	Magnesium	AA-Direct	SUS
25104	Manganese-dissolved	AA-Direct	SUS
07901	N-particulate	Elemental Analyzer	SUS
07651	N-total dissolved	Automated UV Colourimetric	SUS
10401	NFR	Gravimetric	SUS
28002	Nickel-total	AA-Solvent Extraction	SUS
07110	Nitrate/Nitrite	Colourimetric	SUS
07603	Nitrogen-total	Calculated	SUS
10650	Non-Carbonate Hardness	Calculated	SUS
18XXX	Organo Chlorines	Gas Chromatography	SUS
08101	Oxygen-dissolved	Winkler	SUS
15901	P-particulate	Calculated	SUS
15465	P-total dissolved	Automated Colourimetric	SUS
185XX	Phenoxy Herbicides	Gas Chromatography	SUS
15423	Phosphorus-total	Colourimetric (TRAACS)	SUS
19103	Potassium	Flame Emission	SUS
11250	Percent Sodium	Calculated	SUS
011201	SAR	Calculated	SUS
00210	Saturation Index	Calculated	SUS
34108	Selenium-dissolved	ICAP-hydride	SUS
14108	Silica	Automated Colourimetric	SUS
11103	Sodium	Flame Emission	SUS
00211	Stability Index	Calculated	SUS
16306	Sulphate	Automated Colourimetric	SUS
00201	TDS	Calculated	SUS
02061	Temperature	Digital Thermometer	SUS
02073	Turbidity	Nephelometry	SUS
23002	Vanadium-total	AA-Solvent Extraction	SUS
30005	Zinc-total	AA-Solvent Extraction	SUS
10301	pH	Electrometric	SUS
92111	Uranium	Fluometric	SUS

\* - Computer Storage and Retrieval System -- Environment Canada

AA - Atomic Absorption

UV - Ultraviolet

NFR - Nonfilterable Residue

ICAP - Inductively Coupled Argon Plasma.

SUS - Suspended

Responsible Agency: Saskatchewan Environment  
 Data Collected by: SaskPower

ESQUADAT* Code	Parameter	Analytical method	Sampling Frequency Station No.				
			2	3	4	5	6
10151	Alkalinity-phenol	Pot-Titration	DIS	Q	DIS	DIS	OF
10101	Alkalinity-tot	Pot-Titration	DIS	Q	DIS	DIS	OF
13004	Aluminum-tot	AA-Direct	DIS	A	DIS	DIS	
33004	Arsenic-tot	Flameless AA	DIS	A	DIS	DIS	
06201	Bicarbonates	Calculated	DIS	Q	DIS	DIS	OF
05451	Boron-tot	ICAP	DIS	Q	DIS	DIS	W
48002	Cadmium-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
20103	Calcium	AA-Direct	DIS	Q	DIS	DIS	OF
06052	Carbon-tot Inorganic	Infrared	DIS	Q	DIS	DIS	OF
06005	Carbon-tot Organic	Infrared	DIS	Q	DIS	DIS	OF
06301	Carbonates	Calculated	DIS	Q	DIS	DIS	OF
17203	Chloride	Automated Colourimetric	DIS	Q	DIS	DIS	OF
06711	Chlorophyll- 'a'	Spectrophotometry	DIS	Q	DIS	DIS	
24004	Chromium-tot	AA-Direct	DIS	A	DIS	DIS	
36012	Coliform-fec	Membrane filtration	DIS	Q	DIS	DIS	OF
36002	Coliform-tot	Membrane filtration	DIS	Q	DIS	DIS	OF
02041	Conductivity	Conductivity Meter	DIS	Q	DIS	DIS	W
29005	Copper-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
09105	Fluoride	Specific Ion Electrode	DIS	A	DIS	DIS	
82002	Lead-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
12102	Magnesium	AA-Direct	DIS	Q	DIS	DIS	OF
80011	Mercury-tot	Flameless-AA	DIS	A	DIS	DIS	
42102	Molybdenum	AA-Solvent Extract (N-Butyl acetate)	DIS	A	DIS	DIS	
07015	N-TKN	Automated Colourimetric	DIS	Q	DIS	DIS	OF
10401	NFR	Gravimetric	DIS	Q	DIS	DIS	OF
10501	NFR( F)	Gravimetric	DIS	Q	DIS	DIS	OF
28002	Nickel-tot	AA-Solvent Extract (MIBK)	DIS	Q	DIS	DIS	OF
07110	Nitrate + NO <sub>2</sub>	Automated Colourimetric	DIS	Q	DIS	DIS	OF
06521	Oil and Grease	Pet. Ether Extraction	DIS	A	DIS	DIS	
08102	Oxygen-diss	Meter	DIS	Q	DIS	DIS	OF
15406	Phosphorus-tot	Colourimetry	DIS	Q	DIS	DIS	OF
19103	Potassium	Flame Photometry	DIS	Q	DIS	DIS	OF
34005	Selenium-Ext	Hydride generation	DIS	A	DIS	DIS	
11103	Sodium	Flame Photometry	DIS	Q	DIS	DIS	OF
16306	Sulphate	Colourimetry	DIS	Q	DIS	DIS	OF
10451	TDS	Gravimetric	DIS	Q	DIS	DIS	OF
02061	Temperature	Thermometer	DIS	Q	DIS	DIS	OF
23004	Vanadium-tot	AA-Direct	DIS	A	DIS	DIS	
30005	Zinc-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
10301	pH	Electrometric	DIS	Q	DIS	DIS	W

\* Computer storage and retrieval system - Saskatchewan Environment.


**Symbols:**

W – Weekly during overflow; OF– Once during each period of overflow greater than 2 weeks' duration;  
 Q – Quarterly; A – Annually; AA – Atomic Absorption; Pot – Potentiometric; tot – total; Pet – Petroleum;  
 fec – fecal; diss – dissolved; EXT – extract; NFR – Nonfilterable residue; NFR(F) – Nonfilterable residue, fixed;  
 ICAP – Inductively Coupled Argon Plasma; (MIBK) – sample acidified and extracted with Methyl Isobutyl Ketone;  
 DIS - Discontinued.

GROUND-WATER PIEZOMETERS TO MONITOR POTENTIAL DRAWDOWN  
DUE TO COAL-SEAM DEWATERING NEAR THE INTERNATIONAL BOUNDARY

<b>Responsible Agency: Saskatchewan Watershed Authority*</b>			
<b>Measurement Frequency: Quarterly</b>			
<b>Piezometer Number</b>	<b>Location</b>	<b>Tip of Screen Elevation (m)</b>	<b>Perforation Zone (depth in metres)</b>
52	NW 14-1-27 W3	738.43	43-49 (in coal)
507	SW 6-1-26 W3	725.27	34 - 35 (in coal)

\*Data Collected by: SaskPower

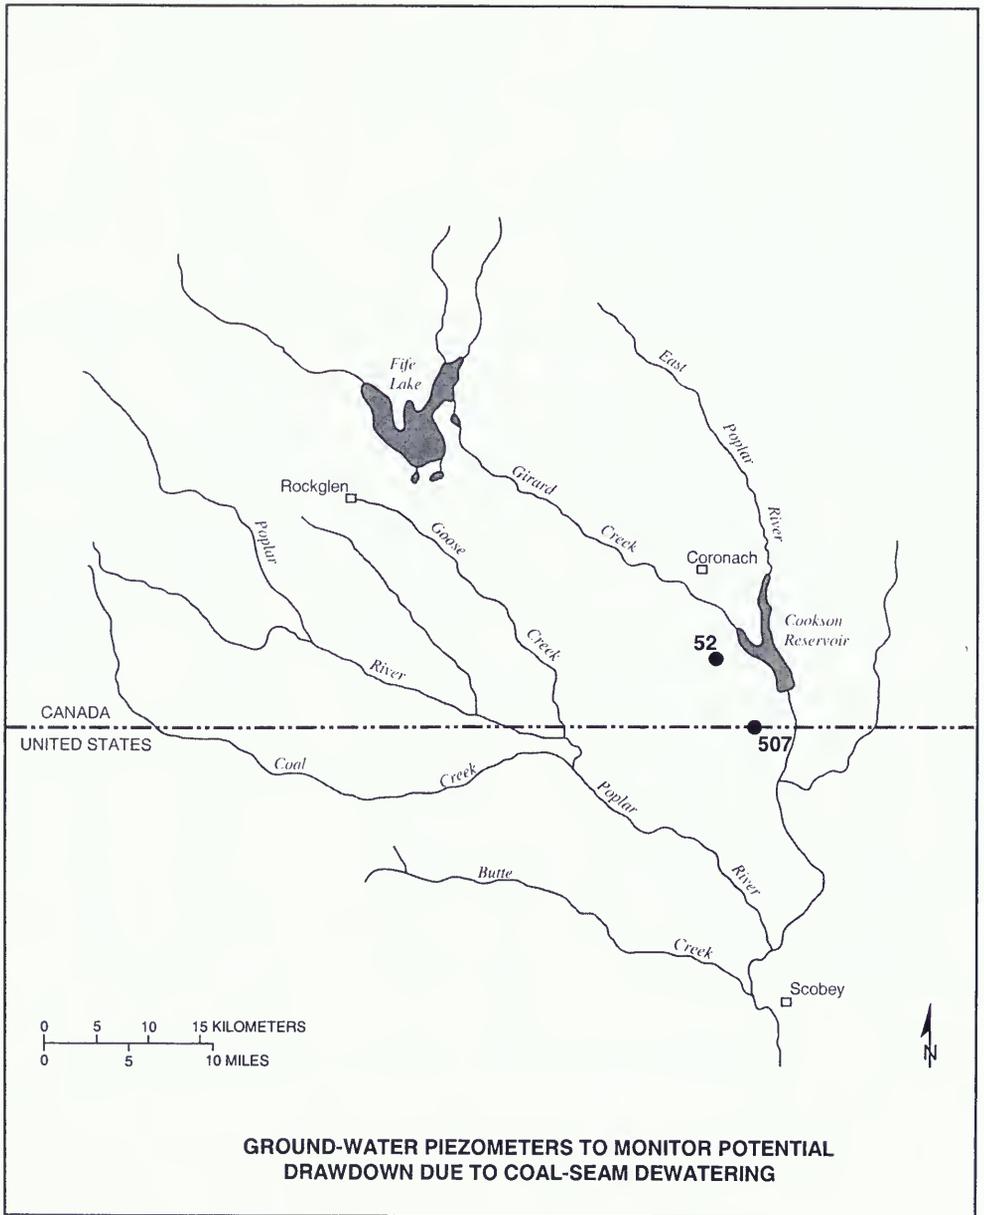

**GROUND-WATER PIEZOMETERS TO MONITOR POTENTIAL  
DRAWDOWN DUE TO COAL-SEAM DEWATERING**


GROUND-WATER PIEZOMETER MONITORING - POPLAR RIVER POWER STATION AREA	
SPC Piezometer Number	Completion Formation
C525	Empress
C526	Empress
C527	Empress
C540	Empress
C739	Empress
C740	Empress
C741	Empress
C743	Empress

Water levels measured quarterly

SPC Piezometer Number	Completion Formation
C739	Empress

Samples collected quarterly

# POPLAR RIVER POWER STATION MONITORING LOCATIONS DECEMBER 2005

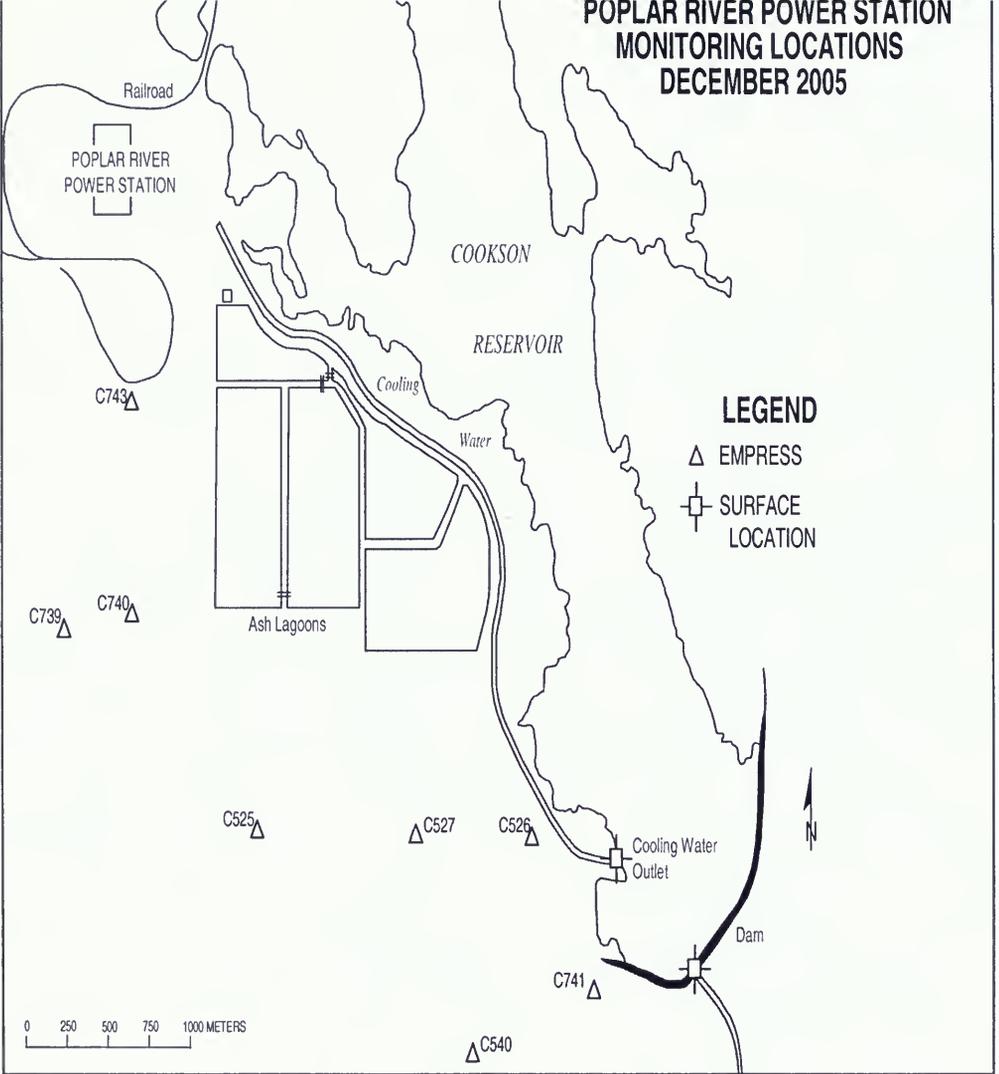

GROUND-WATER PIEZOMETER MONITORING—  
ASH LAGOON AREA--WATER LEVEL

SPC Piezometer Number	Completion Formation
C533	Empress
C534	Oxidized Till
C654	Unoxidized Till
C711	Oxidized Till
C712A	Unoxidized Till
C712B	Intra Till Sand
C712C	Mottled Till
C712D	Oxidized Till
C713	Oxidized Till
C714A	Unoxidized Till
C714B	Unoxidized Till
C714C	Oxidized Till
C714D	Oxidized Till
C714E	Empress
C715	Oxidized Till
C717	Oxidized Till
C720	Oxidized Till
C721	Oxidized Till
C722	Oxidized Till
C723	Oxidized Till
C725	Oxidized Till
C726B	Unoxidized Till
C726C	Oxidized Till
C726E	Empress
C728A	Oxidized Till
C728C	Mottled Till
C728D	Oxidized Till
C728E	Empress
C741	
C742	Empress
C758	Intra Till Sand

GROUND-WATER PIEZOMETER MONITORING— ASH LAGOON AREA--WATER LEVEL	
SPC Piezometer Number	Completion Formation
C763A	Mottled Till
C763B	Oxidized Till
C763D	Unoxidized Till
C763E	Empress

Water levels measured quarterly with the following exceptions:

Two times per year – C715, C725, C741, C758

Three times per year – C763D, C763E

GROUND-WATER PIEZOMETER MONITORING— ASH LAGOON AREA -- WATER QUALITY	
SPC Piezometer Number	Completion Formation
C533	Empress
C534	Oxidized Till
C654	Unoxidized Till
C711	Oxidized Till
C712A	Unoxidized Till
C712B	Intra Till Sand
C712C	Mottled Till
C712D	Oxidized Till
C713	Oxidized Till
C714A	Unoxidized Till
C714B	Unoxidized Till
C714C	Oxidized Till
C714D	Oxidized Till
C714E	Empress
C715	Oxidized Till
C717	Oxidized Till
C720	Oxidized Till
C721	Oxidized Till

GROUND-WATER PIEZOMETER MONITORING—  
ASH LAGOON AREA -- WATER QUALITY

SPC Piezometer Number	Completion Formation
C722	Oxidized Till
C723	Oxidized Till
C725	Oxidized Till
C726B	Unoxidized Till
C726C	Oxidized Till
C726E	Empress
C728A	Oxidized Till
C728C	Mottled Till
C728D	Oxidized Till
C728E	Empress
C741	
C742	Empress
C758	Intra Till Sand
C763A	Mottled Till
C763B	Oxidized Till
C763D	Unoxidized Till
C763E	Empress



DIAGRAM NO.1

POPLAR RIVER POWER STATION  
ASH LAGOONS-MONITORING LOCATIONS  
DECEMBER 2005

- LEGEND**
- OXIDIZED LAYER
  - UNOXIDIZED LAYER
  - ▲ MOTTLED TILL
  - ▲ EMPRESS
  - SAND
  - ✦ ASH ABOVE LINER
  - ✦ SURFACE MONITORING LOCATION
  - TILL-BM


Pneumatic Piezometers are represented by piezometer series: C764, C765, C766, C767, C768, C886, C887, C890, and C893. Remaining piezometers are standard piezometers.

Piezometer C741 and C742 do not appear in this diagram. Piezometer C741 is located 2.4 kilometers (km) south and 0.8 km east of piezometer C715. Piezometer C742 is located 6.4 km south of piezometer C715.

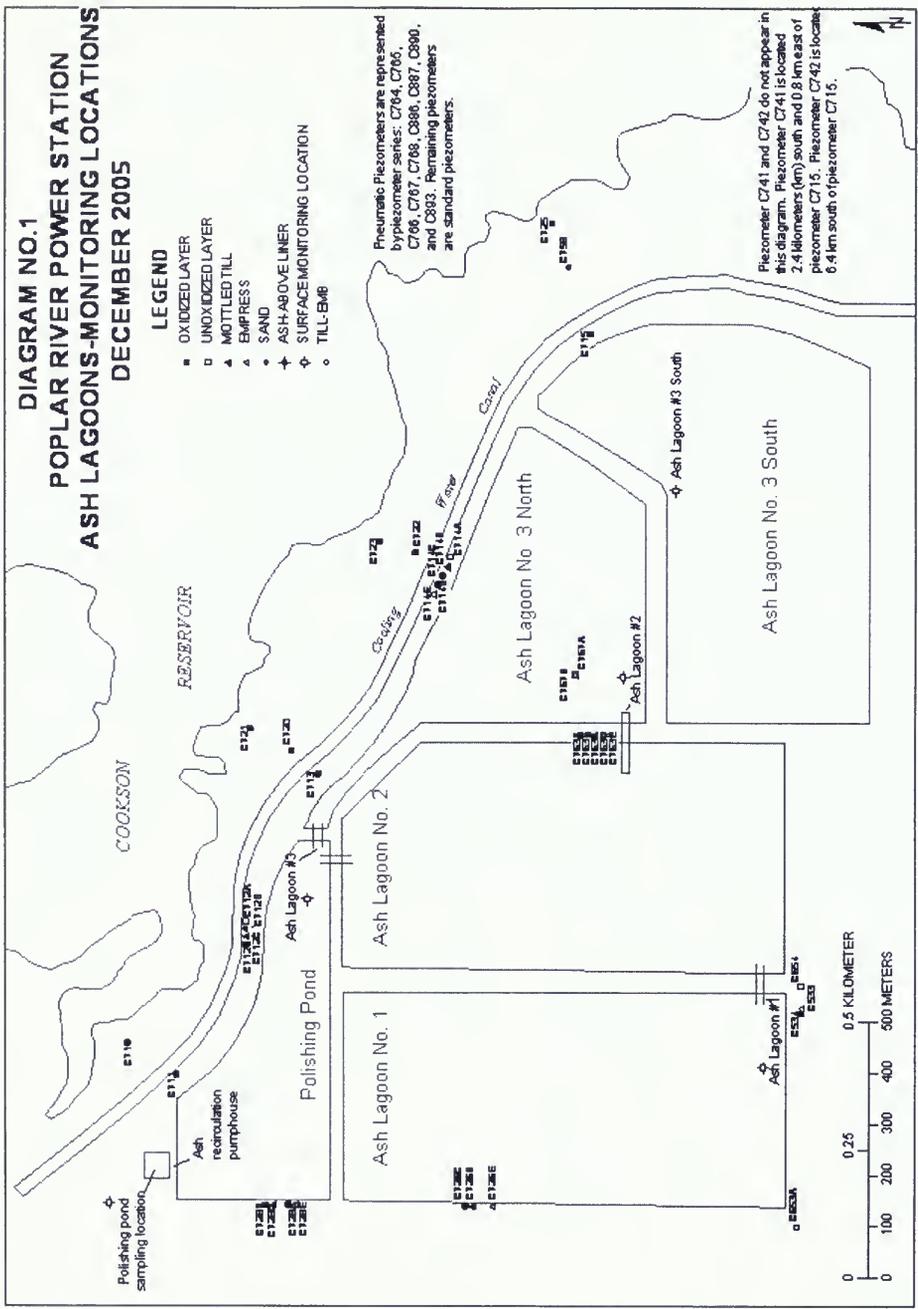

## Ambient Air-Quality Monitoring

<b>Responsible Agency: Saskatchewan Environment</b>			
<b>Data Collected by: SaskPower</b>			
<b>No. On Map</b>	<b>Location</b>	<b>Parameters</b>	<b>Reporting Frequency</b>
1	Coronach (Discontinued)	Sulphur Dioxide	Continuous monitoring with hourly averages as summary statistics.
		Total Suspended Particulate	24-hour samples on 6-day cycle, corresponding to the national air pollution surveillance sampling schedule.
2	International Boundary	Sulphur Dioxide	Continuous monitoring with hourly averages as summary statistics.
		Total Suspended Particulate	24-hour samples on 6-day cycle, corresponding to the national air pollution surveillance sampling schedule.
3	Poplar River Power Station	Wind Speed and Direction	Continuous monitoring with hourly averages as summary statistics
<b>METHODS</b>			
Sulphur Dioxide		Saskatchewan Environment Pulsed fluorescence	
Total Suspended Particulate		Saskatchewan Environment High Volume Method	

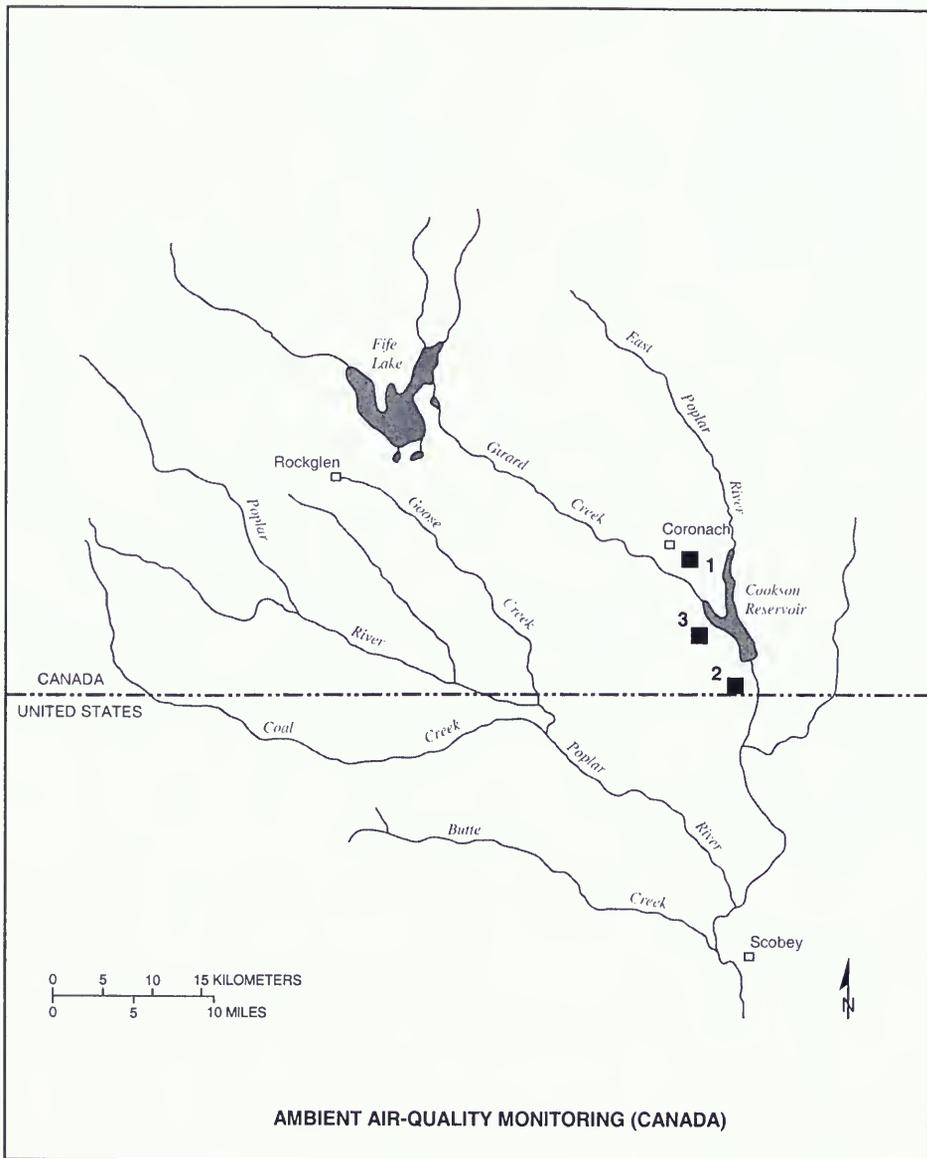

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2006


UNITED STATES



## STREAMFLOW MONITORING

Responsible Agency: U.S. Geological Survey		
No. on Map	Station Number	Station Name
1*	06178000 (11AE008)	Poplar River at International Boundary
2*	06178500 (11AE003)	East Poplar River at International Boundary

\* International Gauging Station

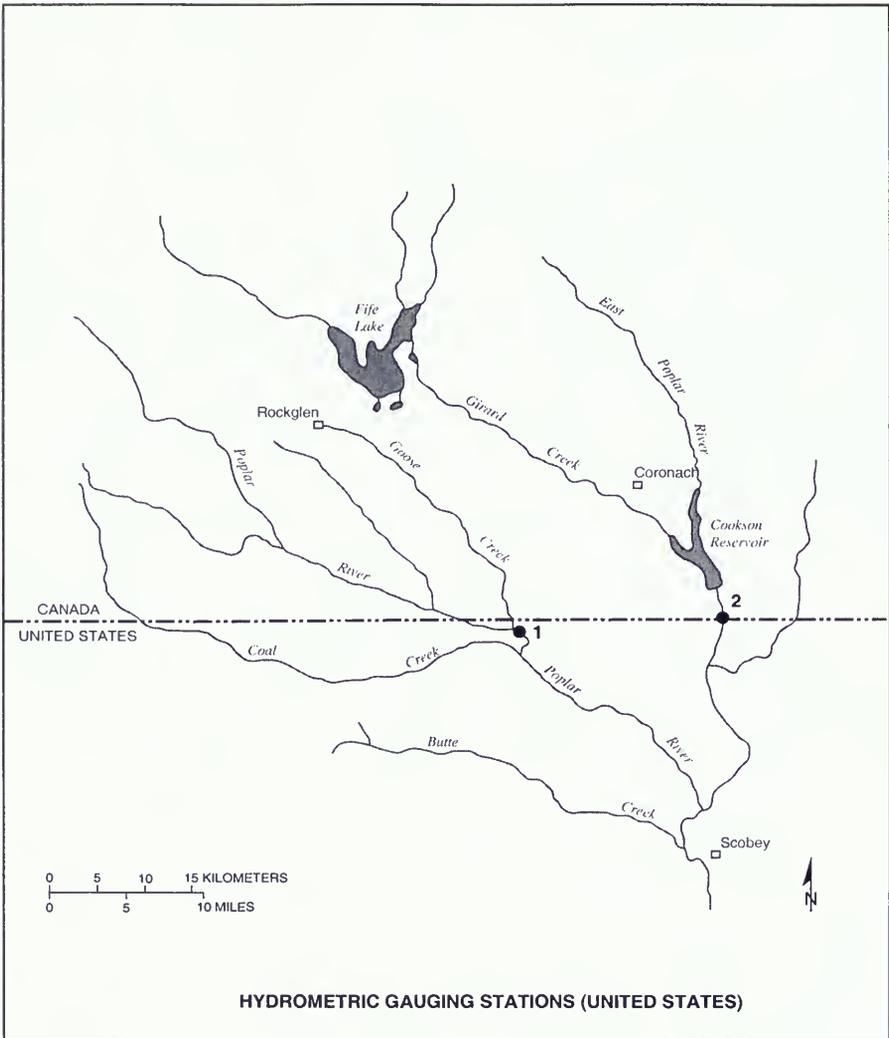

**HYDROMETRIC GAUGING STATIONS (UNITED STATES)**

## SURFACE-WATER-QUALITY MONITORING -- Station Locations


Responsible Agency: U.S. Geological Survey				
No. On Map	USGS Station No.	STATION NAME		
1	06178000	Poplar River at International Boundary		
2	06178500	East Poplar River at International Boundary		
PARAMETERS				
			Annual Sampling Frequency	
Analytical Code	Parameter	Analytical Method	Site 1*	Site 2**
29801	Alkalinity - lab	Fixed endpoint Titration	4	4
00625	Ammonia +Org N-tot	Colorimetric	4	4
00608	Ammonia - diss	Colorimetric	4	4
01000	Arsenic - diss	ICP, MS	4	4
01002	Arsenic - tot	AA, GF	4	4
01005	Barium - diss	ICP, MS	4	4
01007	Barium - total	ICP, MS	4	4
00025	Barometric pressure	Barometer, field	4	4
01020	Boron - diss	ICP	4	4
01025	Cadmium - diss	ICP, MS	4	4
01027	Cadmium - tot/rec	ICP, MS	4	4
00915	Calcium - diss	ICP	4	4
00940	Chloride - diss	IC	4	4
01030	Chromium - diss	AA, GF	4	4
01034	Chromium - tot/rec	AA, GF	4	4
00095	Conductivity	Wheatstone Bridge	4	4
01040	Copper - diss	ICP, MS	4	4
01042	Copper - tot/rec	ICP, MS	4	4
00061	Discharge - inst	Direct measurement	4	4
00950	Fluoride - diss	ISE	4	4
01046	Iron - diss	ICP	4	4
01045	Iron - tot/rec	ICP	4	4
01049	Lead - diss	ICP	4	4
01051	Lead - tot/rec	ICP, MS	4	4
00925	Magnesium - diss	ICP	4	4
01056	Manganese - diss	ICP, MS	4	4
01055	Manganese - tot/rec	ICP, MS	4	4
01065	Nickel - diss	ICP, MS	4	4
71900	Mercury - diss	CVAF	4	4
71890	Mercury - tot/rec	CVAF	4	4
01067	Nickel - diss	ICP, MS	4	4
00613	Nitrite - diss	Colorimetric	4	4
00631	Nitrate + Nitrite - diss	Colorimetric	4	4
00300	Oxygen-diss	Oxygen membrane, field	4	4
00400	pH	Electrometric, field	4	4
00671	Phos, Ortho-diss	Colorimetric	4	4
00665	Phosphorous - tot	Colorimetric	4	4
00935	Potassium - diss	AA	4	4
00931	SAR	Calculated	4	4
80154	Sediment - conc.	Filtration-Gravimetric	4	4
80155	Sediment - load	Calculated	4	4
01145	Selenium - diss	ICP, MS	4	4
01147	Selenium tot	ICP, MS	4	4
00955	Silica - diss	Colorimetric	4	4
00930	Sodium - diss	ICP	4	4
00945	Sulphate - diss	IC	4	4
70301	Total Dissolved Solids	Calculated	4	4
00010	Temp Water	Stem Thermometer	4	4
00020	Temp Air	Stem Thermometer	4	4
01090	Zinc - diss	ICP, MS	4	4
01092	Zinc - tot/rec	ICP, MS	4	4

Samples collected obtained during the monthly periods:

\* -- March - April; May; June; July - September

\*\* -- May; June; July; August - September

Abbreviations: AA - atomic absorption; conc. - concentration; CVAF - cold vapor atomic fluorescence; diss - dissolved; GF - graphite furnace; IC - ion exchange chromatography; ICP - inductively coupled plasma; ISE - ion-selective electrode; MS - mass spectrography ; Org - organic; phos. - phosphate; tot - total; tot/rec - total recoverable

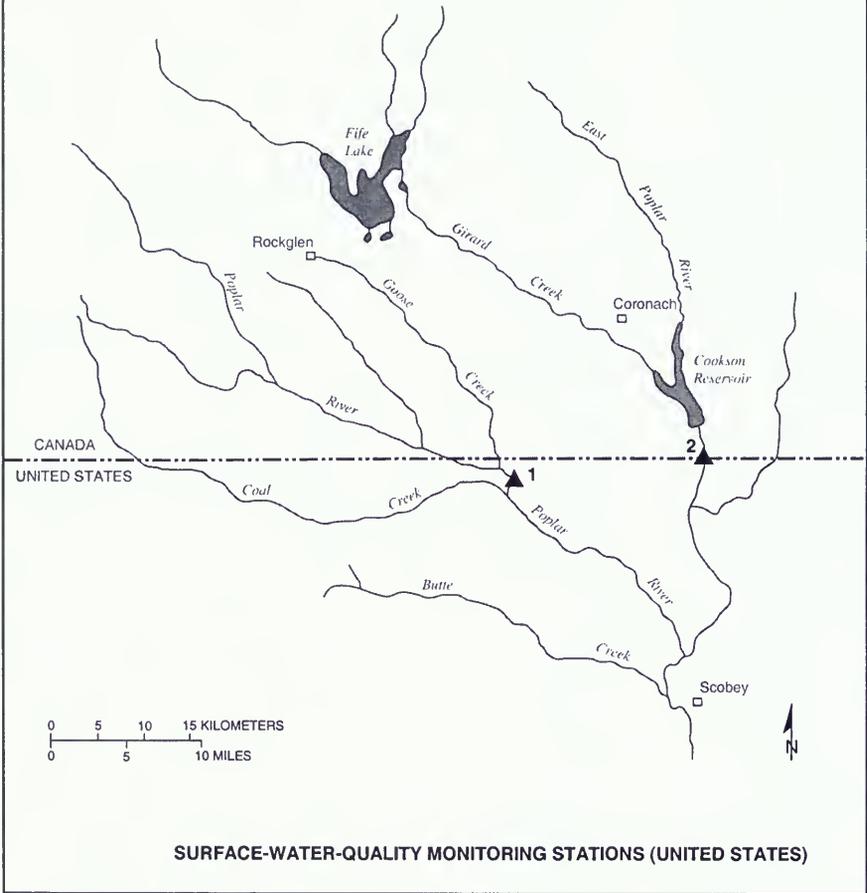


## GROUND-WATER-QUALITY MONITORING -- Station Locations

Responsible Agency: Montana Bureau of Mines and Geology					
Map Number	Well Location	Total Depth (m)	Casing Diameter (cm)	Aquifer	Perforation Zone (m)
7	37N47E12BBBB	44.1	10.2	Hart Coal	39-44
16	37N46E3ABAB	25.5	10.2	Fort Union	23-25
24	37N48E5AB	9.6	10.2	Alluvium	9.2-9.6
Parameters					
Storet ** Code	Parameter	Analytical Method	Sampling Frequency Station No.		
00440	Bicarbonates	Electrometric Titration	Sample collection is annually for all locations identified above.  The analytical method descriptions are those of the Montana Bureau of Mines and Geology Laboratory where the samples are analyzed.		
01020	Boron-diss	Emission Plasma, ICP			
00915	Calcium	Emission Plasma			
00445	Carbonates	Electrometric Titration			
00940	Chloride	Ion Chromatography			
00095	Conductivity	Wheatstone Bridge			
00950	Fluoride	Ion Chromatography			
01046	Iron-diss	Emission Plasma, ICP			
01049	Lead-diss	Emission Plasma, ICP			
01130	Lithium-diss	Emission Plasma, ICP			
00925	Magnesium	Emission Plasma, ICP			
01056	Manganese-diss	Emission Plasma, ICP			
01060	Molybdenum	Emission Plasma, ICP-MS			
00630	Nitrate	Ion Chromatography			
00400	pH	Electrometric			
00935	Potassium	Emission Plasma, ICP			
00931	SAR	Calculated			
01145	Selenium-diss	ICP-MS			
00955	Silica	Emission Plasma, ICP-MS			
00930	Sodium	Emission Plasma, ICP			
01080	Strontium-diss	Emission Plasma, ICP			
00445	Sulphate	Ion Chromatography			
00190	Zinc-diss	Emission Plasma, ICP			
70301	TDS	Calculated			

**SYMBOLS:**


\*\* - Computer storage and retrieval system -- EPA  
 cm - centimetres  
 diss - dissolved

ICP - Inductively Coupled Plasma Unit  
 ICP - MS - Inductively Coupled Plasma - Mass Spectrometry  
 m - metre

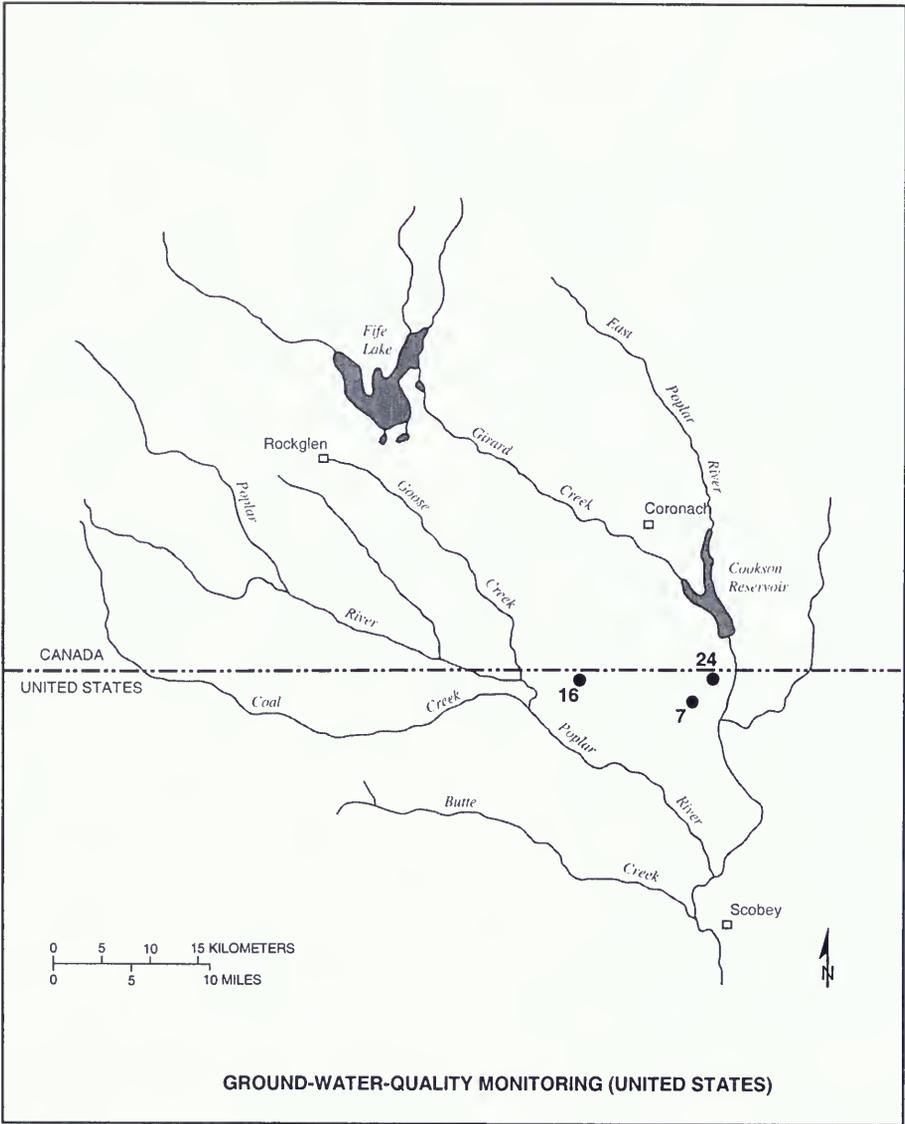

**GROUND-WATER LEVELS TO MONITOR POTENTIAL  
DRAWDOWN DUE TO COAL-SEAM DEWATERING**

<b>Responsible Agency: Montana Bureau of Mines and Geology</b>	
<b>No. on Map</b>	<b>Sampling</b>
5,6,7,8,9,10,11,13,16,17,19,22,23,24	Determine water levels quarterly

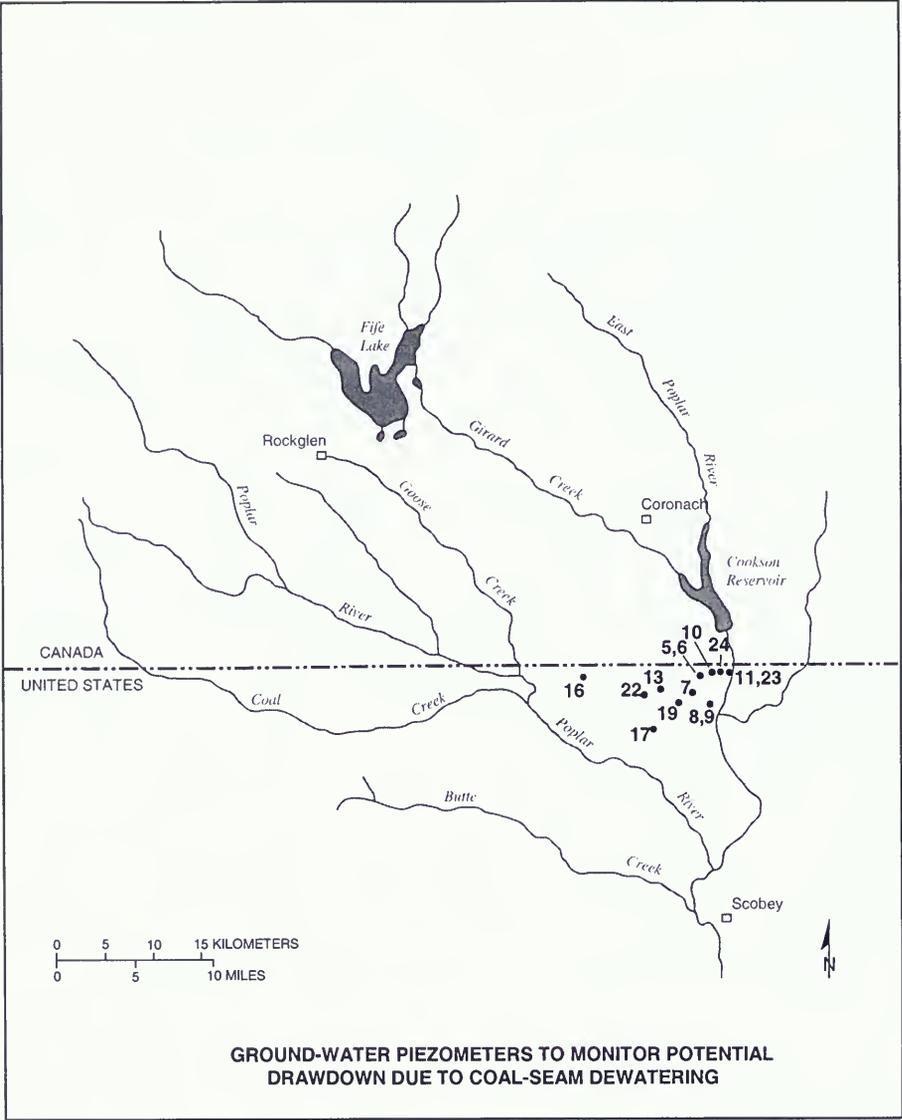

**GROUND-WATER PIEZOMETERS TO MONITOR POTENTIAL  
DRAWDOWN DUE TO COAL-SEAM DEWATERING**

**ANNEX 3**

**RECOMMENDED FLOW APPORTIONMENT  
IN THE POPLAR RIVER BASIN  
BY THE INTERNATIONAL SOURIS-RED RIVERS ENGINEERING BOARD,  
POPLAR RIVER TASK FORCE (1976)**



**\*RECOMMENDED FLOW APPORTIONMENT  
IN THE POPLAR RIVER BASIN**

The aggregate natural flow of all streams and tributaries in the Poplar River Basin crossing the International Boundary shall be divided equally between Canada and the United States subject to the following conditions:

1. The total natural flow of the West Fork Poplar River and all its tributaries crossing the International Boundary shall be divided equally between Canada and the United States but the flow at the International Boundary in each tributary shall not be depleted by more than 60 percent of its natural flow.
2. The total natural flow of all remaining streams and tributaries in the Poplar River Basin crossing the International Boundary shall be divided equally between Canada and the United States. Specific conditions of this division are as follows:
  - (a) Canada shall deliver to the United States a minimum of 60 percent of the natural flow of the Middle Fork Poplar River at the International Boundary, as determined below the confluence of Goose Creek and Middle Fork.
  - (b) The delivery of water from Canada to the United States on the East Poplar River shall be determined on or about the first day of June of each year as follows:
    - (i) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period does not exceed 4,690 cubic decameters (3,800 acre-feet), then a continuous minimum flow of 0.028 cubic metres per second (1.0 cubic foot per second) shall be delivered to the United States on the East Poplar River at the International Boundary throughout the succeeding 12 month period commencing June 1st. In addition, a volume of 370 cubic decameters (300 acre-feet) shall be delivered to the United States upon demand at any time during the 12 month period commencing June 1st.
    - (ii) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period is greater than 4,690 cubic decameters (3,800 acre-feet), but does not exceed 9,250 cubic decameters (7,500 acre-feet),

\* Canada-United States, 1976, Joint studies for flow apportionment, Poplar River Basin, Montana-Saskatchewan: Main Report, International Souris-Red Rivers Board, Poplar River Task Force, 43 pp.

then a continuous minimum flow of 0.057 cubic metres per second (2.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.028 cubic metres per second (1.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 617 cubic decameters (500 acre-feet) shall be delivered to the United States upon demand at any time during the 12-month period commencing June 1st.

- (iii) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period is greater than 9,250 cubic decameters (7,500 acre-feet), but does not exceed 14,800 cubic decameters (12,000 acre-feet), then a continuous minimum flow of 0.085 cubic metres per second (3.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.057 cubic metres per second (2.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 617 cubic decameters (500 acre-feet) shall be delivered to the United States upon demand at any time during the 12 month period commencing June 1st.
- (iv) When the total natural flow of the Middle Fork Poplar, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period exceeds 14,800 cubic decameters (12,000 acre-feet) then a continuous minimum flow of 0.085 cubic metres per second (3.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.057 cubic metres per second (2.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 1,230 cubic decameters (1,000 acre-feet) shall be delivered to the United States upon demand at any time during the 12-month period commencing June 1st.
- (c) The natural flow at the International Boundary in each of the remaining individual tributaries shall not be depleted by more than 60 percent of its natural flow.

3. The natural flow and division periods for apportionment purposes shall be determined, unless otherwise specified, for periods of time commensurate with the uses and requirements of both countries.



## ANNEX 4

### CONVERSION FACTORS



## CONVERSION FACTORS

ac	=	4,047 m <sup>3</sup> = 0.04047 ha
ac-ft	=	1,233.5 m <sup>3</sup> = 1.2335 dam <sup>3</sup>
°C	=	5/9(°F-32)
cm	=	0.3937 in.
cm <sup>2</sup>	=	0.155 in <sup>2</sup>
dam <sup>3</sup>	=	1,000 m <sup>3</sup> = 0.8107 ac-ft
ft <sup>3</sup>	=	28.3171 x 10 <sup>-3</sup> m <sup>3</sup>
ha	=	10,000 m <sup>2</sup> = 2.471 ac
hm	=	100 m = 328.08 ft
hm <sup>3</sup>	=	1 x 10 <sup>6</sup> m <sup>3</sup>
I. gpm	=	0.0758 L/s
in	=	2.54 cm
kg	=	2.20462 lb = 1.1 x 10 <sup>-3</sup> tons
km	=	0.62137 miles
km <sup>2</sup>	=	0.3861 mi <sup>2</sup>
L	=	0.3532 ft <sup>3</sup> = 0.21997 l. gal = 0.26420 U.S. gal
L/s	=	0.035 cfs = 13.193 I. gpm = 15.848 U.S. gpm
m	=	3.2808 ft
m <sup>2</sup>	=	10.765 ft <sup>2</sup>
m <sup>3</sup>	=	1,000 L = 35.3144 ft <sup>3</sup> = 219.97 I. gal= 264.2 U.S. gal
m <sup>3</sup> /s	=	35.314 cfs
mm	=	0.00328 ft
tonne	=	1,000 kg = 1.1023 ton (short)
U.S. gpm	=	0.0631 L/s

### For Air Samples

$$\text{ppm} = 100 \text{ pphm} = 1000 \times (\text{Molecular Weight of substance}/24.45) \text{ mg/m}^3$$





**STATE DOCUMENTS COLLECTION**

FEB 20 2007

MONTANA STATE LIBRARY  
1515 E. 6th AVE.  
HELENA, MONTANA 59620